

---

## MultiStim Fracture Isolation System

# MultiStim 3J Running Tool

- Simple design and operation
- Full bore inside diameter
- 3J Seal Assembly is used as the liner running tool and tie-back seal
- Chevron seal design is rated at 300°F and 10,000 psi

The 3J Running Tool is composed of two robust components — the 3J Seal Assembly and the 3J Receptacle. The retrievable-reusable 3J Seal Assembly features external high load rated lugs and a high performance V-seal assembly for elevated bottom hole temperatures and multiple fluids compatibility.

The 3J Receptacle is a one-piece design to facilitate high torque, tensile and pressure ratings. The 3J Receptacle incorporates a stab-in guide, internal J-slot and polished seal bore.

### Simple Design

The 3J Running Tool is designed for ease of downhole operation. The 3J Running Tool is designed to enable rotation during the liner installation. Once the liner has been installed, and the open hole packers and liner hanger packer have been set and tested, simply apply compression to the run-in string, apply a ¼ right-hand turn, and pick up to disconnect. A tie-back fracturing string can be reconnected with a straight stab-in 3J Receptacle with the 3J Seal Assembly.

### Full Bore Design

The minimum inside diameter through the 3J Running Tool is equal to that of the minimum liner.

### Design and Manufacturing Standards



The MultiStim Running Tool and MultiStim Fracture Isolation System components are designed and manufactured to API Q1 standards at our certified manufacturing facility.



**MultiStim Fracture Isolation System**  
**MultiStim 3J Seal Assembly**

Dim.	(in)	(mm)
A	6.00	152.40
B	4.500 8RL	
C	70.60	1793.20
D	52.10	1323.30
E	44.10	1120.10
F	34.60	878.80
G	22.70	576.90
H	15.60	396.20
J	8.60	218.40
K	4.00	101.60
L	5.59	141.99
M	4.85	123.19
N	5.00	127.00
P	5.90	149.90
Q	5.50	139.70


Tool Ratings		
Rating	Value	
Pressure	10,000 psi	68,950 kPa
Tensile	125,000 lbs	55,600 daN

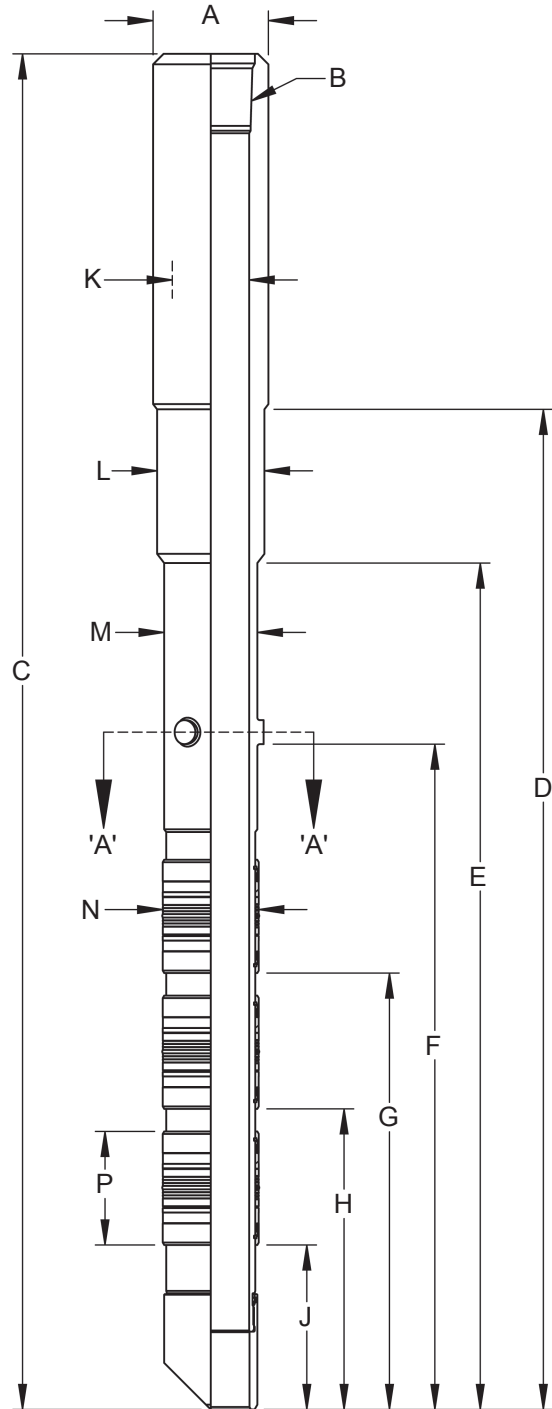

**MultiStim Fracture Isolation System**

**MultiStim 3J Liner Top Receptacle**

Dim.	(in)	(mm)
A	6.00	152.40
B	64.40	1635.80
C	67.90	1724.00
D	52.90	1343.00
E	10.00	254.00
F	4.500 8RL	
G	5.61	142.49
H	5.00	127.00
J	4.00	101.60
K	8.10	205.70
L	5.05	128.30



---

**MultiStim Fracture Isolation System**  
**MultiStim 3J Running Tool**

**Headquarters**

**Canada**

635 8th Avenue Southwest  
Suite 850  
Calgary, Alberta T2P 3M3  
403.930.6810 | Fax 403.930.6811  
888.486.6583 (*toll free*)

**USA**

11027 Lucerne Street  
Houston, Texas 77016-1920 USA  
281.219.6613 | Fax 281.227.7009

**Canadian Service Centers**

**Bonnyville**

5703 52nd Avenue  
Bonnyville, Alberta T9N 2P5  
780.826.6290 | Fax: 780.826.6291

**Brooks**

311 9th Street  
Unit 8  
Brooks, Alberta T1R 1C2  
403.793.2389 | Fax 403.793.2497

**Edmonton**

7043 56th Street  
Edmonton, Alberta T3L 26B  
780.430.4250 | Fax 780.440.4285  
780.472.2346 (*warehouse*)

**Estevan**

108 Highway 47 South  
Estevan, Saskatchewan  
306.637.2111 | Fax 306.637.2114

**Grande Prairie**

7001 98th Street  
Suite 104  
Clairmont, Alberta T0H 0W0  
780.538.0560 | Fax 780.513.0142

**Kindersley**

1310 9th Avenue West  
Kindersley, Saskatchewan S0L 1S0  
306.463.3247 | Fax 306.463.3248

**Lloydminster**

6402 56th Street  
Lloydminster, Alberta  
780.808.8788 | Fax 780.875.0764

**Red Deer**

7628 49th Avenue  
Bay 3  
Red Deer, Alberta T4P 1M4  
403.314.9329 | Fax 403.314.1193

*This document contains copyrighted and confidential information, and is the property of Logan Completion Systems. It is revealed for limited purposes. It may not be reproduced without the written consent of Logan Completion Systems. This document is not to be rented, loaned, or sold, either alone or in conjunction with equipment or product.*