



**High Pressure Type L
Packer Type Casing Patches**

Contents

Logan High Pressure Type L Packer Type Casing Patches

Overview.....	2
Uses	2
Construction	2
Operation.....	3
To Engage a Fish.....	3
Salvaging Stuck Casing.....	3
To Release From a Fish.....	3
Maintenance	3
Disassembly	4
Assembly	4
7K, 10K, and 12K Tool Illustration	5
7K Assembly:	
Specifications and Parts Lists	6 – 7
Strength Data	8 – 12
10K Assembly:	
Specifications and Parts Lists	13
Strength Data	14 – 17
12K Assembly:	
Specifications and Parts Lists	18
Strength Data	19 – 22
15K Tool Illustration	23
Specifications and Parts Lists	24
Strength Data	25 – 26

November 2013. Rev. 2

OVERVIEW

Logan High Pressure Type L Packer Type Casing Patches are designed to engage and seal off a properly prepared casing string. The Casing Patch design leaves the operator with a casing string that has a full-bore internal diameter. Logan High Pressure Type L Packer Type Casing Patches will not restrict the bore of the casing and are available in popular casing sizes from 4-1/2 to 13-5/8 inches OD. Larger size Casing Patches are available upon request.

The Logan High Pressure Type L Packer Type Casing Patches are available in 7,000, 10,000, and 12,000 psi working pressure ratings and are designed to seal both internal and external pressure. Lower and higher pressure Casing Patches of this design are available upon request. Logan also manufactures a High Pressure Casing Patch that is rated at 15,000 psi working pressure.

Logan High Pressure Type L Packer Type Casing Patches are available with or without five-foot extension subs. Extension subs allow sufficient length to catch the casing by pulling additional length into the Casing Patch.

The Type L packer is made from hydrogenated nitrile (HBNR) compound and is rated at 275 °F (dry, with no circulation) and at 325 °F (with partial circulation).

USES

Logan High Pressure Type L Packer Type Casing Patches may be used to patch any casing, but is specifically intended for use in casing landing operations on the sub-surface wellheads of offshore installations.

Logan High Pressure Type L Packer Type Casing Patches for H₂S (sour service) are available upon request.

CONSTRUCTION

The Logan High Pressure Type L Packer Type Casing Patch is very similar in design and construction to the Logan Series 150 Overshot. A top sub, extension sub (optional), bowl, and cut-lipped guide make up the outer components of the assembly. A basket grapple control, basket grapple, four Logan Type L packers, packer protector, and shear pins are components inside the assembly. Major load bearing components are manufactured from 4140 alloy steel. The Type L packers are composed of a blend of synthetic rubber and Kevlar material that is compatible for service with most drilling and completion fluids, and is resistant to gas invasion and abrasion.

The top sub is the uppermost component of the Casing Patch assembly.

The bowl is the major working component of the Casing Patch. The inside diameter of the bowl features a tapered helical section that conforms to the exterior tapered helix of the basket grapple. This design permits any expansion or compression strain to be evenly distributed over the entire working surface of the bowl, basket grapple, and the fish (casing that is to be engaged during a casing landing operation). Any possible damage to the fish or Casing Patch is thereby minimized.

The bowl contains and supports the load-bearing basket grapple. The basket grapple is the gripping mechanism of the Casing Patch. The basket grapple is a slotted, expandable cylinder that freely opens to allow the fish to enter and securely engages it with the hardened wickers of its inside diameter. Its tapered exterior conforms to the interior of the bowl.

As tensile load is applied and increased on the bowl, the tapered helices between the bowl and the basket grapple's outside diameter cause the basket grapple to tightly engage a large area of the fish.

The basket grapple control acts as a key that transmits torque from the bowl to the grapple while allowing the grapple to move vertically inside the bowl during operation.

Extension subs are used when the upper portion of the fish is damaged and can not be engaged. Additional extension subs will permit the Casing Patch to be lowered far enough over the fish to ensure secure engagement and pack off. Extension subs are five feet long.

After the fish is engaged and passed into the extension sub, the uppermost packer provides a second seal around the fish.

The packer protector prevents the upper lip of the packer from being damaged when the fish enters the packer. Shear pins hold the packer protector in place until it is displaced by the fish. When the casing enters the casing patch, it will make contact at the bottom of the packer protector and cause the packer protector to slide upward.

The lowermost component of the Casing Patch assembly is the cut-lipped guide. As the name implies, it guides the fish into the internal gripping mechanism (basket grapple) of the Casing Patch. The guide also minimizes possible damage to the Casing Patch by blocking the entry of a fish that exceeds its maximum casing OD.

OPERATION

To Engage a Fish

Prior to operation, check the Logan High Pressure Type L Packer Type Casing Patch to assure that it is complete and properly assembled. Proper preparation of the casing to be patched is important to the success of the Casing Patch. The casing should be washed over to remove scale and splits, and the pipe sized for a uniform sealing surface.

The properly assembled Casing Patch should be lowered to the top of the fish. The combination of slow rotation with slow lowering is important to the operation of the assembly.

Continue slowly lowering the Casing Patch while maintaining slow rotation until the fish enters the Casing Patch far enough to displace the packer protector and enter the packers. The casing hanger should seat in the wellhead at the same time the fish displaces the packer protector and enters the packers. Once the fish has entered the Casing Patch, slowly reduce the rotation until the packer protector bottoms out against the shoulder in the top sub and the casing is fully engaged in the patch. Apply a tensile load to the Casing Patch to set the grapple. The slips should then be set on the running string.

Proper engagement may be proven by picking up on the casing hanger and testing by applying pump pressure. Allow any torque to slack from the running string. Avoid any backlash.

To test the patch, slowly engage the mud pumps so as not to slug the packers with excessive pressure. Then bring the pressure up to the desired test pressure.

CAUTION: *Carefully and gradually increase the pump pressure to allow the packer to seat smoothly. Under no circumstances should the Casing Patch be shock loaded (slugged) by the mud pumps.*

Once the fish has entered the Casing Patch and dislodged the packer protector, and the tool is subsequently disengaged from the fish, no attempt should be made to re-engage the tool without first bringing it to the surface to reset the packer protector. The upper lip of the packer may be ruptured and rendered useless if the packer protector is not in position.

NOTE: *The Casing Patch may be easily released any time prior to cementing. However, once it is cemented in place, the internal parts may no longer function and the Casing Patch may fail to release. In such cases, it may be removed by milling it away or cutting the casing string below the Casing Patch, whichever is simpler.*

Salvaging Stuck Casing

Sometimes, during landing operations, the casing being landed gets stuck off bottom. If this happens while the casing is being floated down in cement, an expensive and time consuming fishing job could result.

In place of conventional fishing, the operation may be salvaged by using a Logan High Pressure Type L Packer Type Casing Patch in the following manner:

Assemble a length of casing between the casing hanger and the top sub. The operator should determine the required length of casing so that when the Casing Patch is engaged, the casing hanger will be seated in the casing wellhead.

Locate the first collar below the wellhead. Cut the casing immediately below this collar with a Logan Hydraulic Internal Cutter. Remove the upper portion of the casing from the well. Pick up the remaining portion of casing with the Logan High Pressure Type L Packer Type Casing Patch, pull it up into the wellhead and lock it in position.

After the cement cures, additional tension may be applied to the cemented string by catching it with a Logan Standard Releasing Spear. Pull the upper end of the cemented string several feet into the extension sub of the Casing Patch provided for the purpose.

CAUTION: *Use tongs on the top sub only. Exerting undue pressure on the bowl may crush or distort the bowl.*

To Release From a Fish

If for any reason it is desired to release the Casing Patch from the casing string, proceed as follows:

Firmly bump down to break the connection between the grapple and the fish. After bumping down, with slow right-hand rotation slowly raise the running string. Continue slow rotation and elevation until the Casing Patch is clear of the fish. Combined slow rotation and elevation is important to the proper release of the Casing Patch.

MAINTENANCE

Since the Logan High Pressure Type L Packer Type Casing Patch is not normally reused, usual maintenance procedures do not apply. However, if the Casing Patch is to be stored for a period of time before its use, the tool should be disassembled, thoroughly cleaned and greased, and reassembled so it is ready for service.

DISASSEMBLY

Disassembly should be conducted in a clean, well-equipped shop.

1. Break out and remove the top sub from the extension sub. Remove the large and small top sub seals from the top sub and discard them.
2. Remove the shear pins from the packer protector.
3. Secure the Casing Patch in a vise. Clamp on the extension sub rather than on the bowl to avoid crushing or distorting the bowl. Loosen the extension sub and cut-lipped guide.
4. Remove the packer protector from the extension sub.
5. Loosen and remove the extension sub from the bowl. Remove the large and small extension sub seals from the extension sub and discard them.
6. Remove the four (4) Type L packers from the bowl and discard them.

NOTE: The 15K working pressure Casing Patch for 14-inch casing also has four (4) each steel non-extrusion rings and lead seal protector rings as illustrated on page 24.

7. Loosen and remove the cut-lipped guide from the bowl.
8. Remove the basket grapple control from the basket grapple.
9. With right-hand rotation, unscrew the basket grapple from the lower end of the bowl.

ASSEMBLY

The Logan High Pressure Type L Packer Type Casing Patch is easily assembled using standard shop tools. No special tools are required.

Make sure all parts have been thoroughly cleaned, inspected, and lubricated prior to assembly.


1. Insert the four (4) Type L packers into the spaces provided in the bowl.
2. Insert the packer protector into the bowl from the guide end with the stinger end first.
3. After packer protector has been installed and covers all packers, insert the packer protector shear pins through the packer protector.
4. Screw the basket grapple into the lower end of the bowl, using left-hand rotation. The slot in the basket grapple should align with the slot in the bowl.
5. Insert the basket grapple control. Fit the finger of the basket grapple control into the slots of the bowl and the basket grapple. This keys the bowl and the basket grapple together.
6. Screw the cut-lipped guide into the lower end of the bowl.

NOTE: The 15K working pressure Casing Patch for 14-inch casing also has four (4) each steel non-extrusion rings and lead seal protector rings as illustrated on page 24.

7. Install the large and small extension sub seals on the extension sub. Then screw the extension sub into the top of the bowl.
8. Secure the Casing Patch in a vise. Clamp on the extension sub rather than the bowl, to avoid crushing or distorting the bowl. Tighten the extension sub and cut-lipped guide threaded connections.
9. Install the large and small top sub seals on the top sub. Assemble the extension sub(s) and top sub. Tighten the threaded connections.

If the Casing Patch is to be stored for some time before being used, paint or coat the outside with grease to prevent rust or corrosion.

The Logan High Pressure Type L Packer Type Casing Patch is now ready for use.

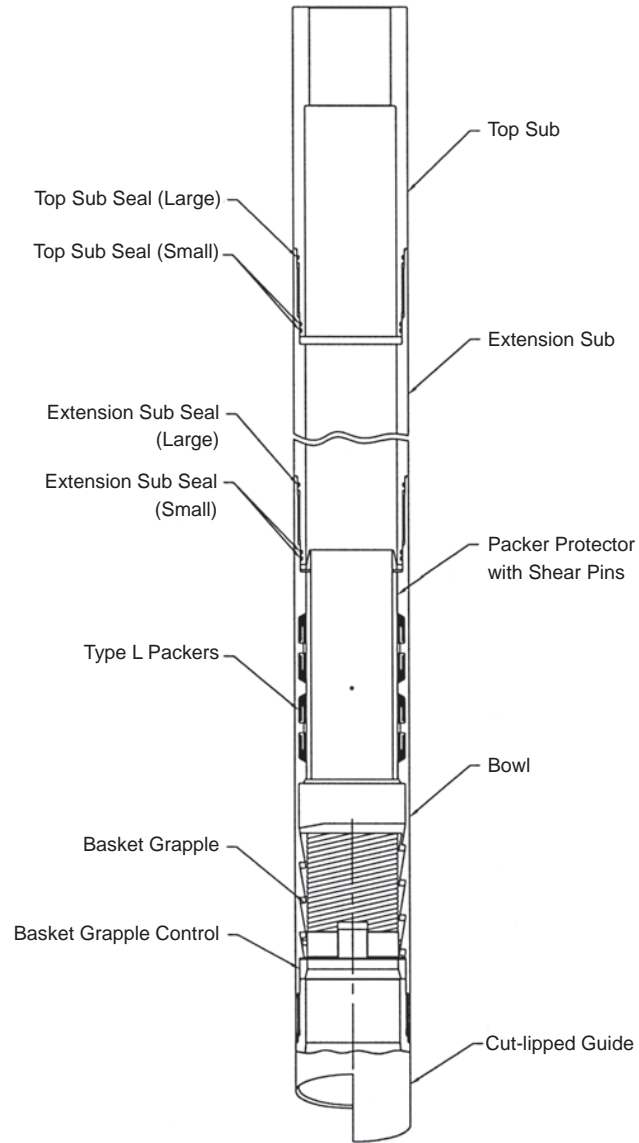

**Logan Type L Packer Type Casing Patch
for 7K, 10K, and 12K Assemblies**

Logan Oil Tools reserves the right to change or discontinue designs without notice.



LOGAN HIGH PRESSURE TYPE L PACKER TYPE CASING PATCH - 7,000 PSI

O.D. CASING		4-1/2	5	5-1/2	7	7-5/8	9-5/8	9-7/8
O.D. PATCH		5-3/4	6-1/4	6-13/16	8-3/8	9	11-1/4	11-9/16
PRESSURE RATING (PSI)		7,000	7,000 **	7,000	7,000	7,000	7,000	7,000
COMPLETE ASSEMBLY	Logan Part No.	509-709 *	509-710 *	509-700	509-711	509-714 *	503L-014	509-703
TOP SUB	Logan Part No.	ZL1005	LP1010	LP1000	LP1011	LP1014	...	LP1003
TOP SUB SEAL (SMALL)	Logan Part No.	568-248	568-252	568-257	568-263	568-265	568-274	568-274
	No. Req'd	2	2	2	2	2	2	2
TOP SUB SEAL (LARGE)	Logan Part No.	568-251	568-254	568-257	568-265	568-266	568-274	568-275
	No. Req'd	1	1	1	1	1	1	1
BOWL	Logan Part No.	ZL2005	LP2010	LP2000	LP2011	LP2014	ZL2014	LP2003
GUIDE	Logan Part No.	Z7005	LP3010	LP3000	Z7011	Z7012	ZL7014	LP3003
SHEAR PINS	Logan Part No.	AC14002	AC14002	AC14002	AC14002	AC14002	AC14002	AC14002
	No. Req'd	2	2	2	2	2	2	2
TYPE L PACKER	Logan Part No.	AT6009	AT6010	AT6000	AT6001	AT6014	AT6002	AT6003
	No. Req'd	4	4	4	4	4	2	4
PACKER PROTECTOR	Logan Part No.	ZL3005	ZL3006	ZL3007	ZL3011	AT7014	ZL3014	AT7003
GRAPPLE CONTROL	Logan Part No.	Z6005 *	Z6006 *	ZL6007	Z6011	Z6012 *	ZL6014 *	AT10003
GRAPPLE	Logan Part No.	Z5005	ZL5006	ZL5007	Z5011	AT11014	ZL5014	AT11003

OPTIONAL

EXTENSION SUB (5 feet long)	Logan Part No.	ZLE1005	LPE1010	LPE1000	LPE1011	LPE1014	ZLE1014	LPE1003
EXTENSION SUB SEAL (SMALL)	Logan Part No.	568-248	568-252	568-257	568-263	...	568-274	568-274
	No. Req'd	2	2	2	2	...	2	2
EXTENSION SUB SEAL (LARGE)	Logan Part No.	568-251	568-254	568-257	568-265	...	568-274	568-275
	No. Req'd	1	1	1	1	...	1	1

Logan Oil Tools reserves the right to change or discontinue designs without notice.

Notes:

- (1) H₂S casing patches available upon request.
- (2) Higher pressure casing patches of this design are available upon request.
- (3) Other sizes of casing patches are available upon request.
- (4) Casing patches can be made from special materials. Prices and delivery information is available upon request.

* Assembly furnished with mill control packer.

** Strength chart available upon request.

When ordering, please specify:

- (1) Complete assembly or part number
- (2) Size and type of connection
- (3) With or without five-foot extensions



LOGAN HIGH PRESSURE TYPE L PACKER TYPE CASING PATCH - 7,000 PSI

O.D. CASING		10-3/4	13-3/8	13-5/8	20			
O.D. PATCH		12-5/16	15-1/2	15-3/4	23-1/2			
PRESSURE RATING (PSI)		6,000	7,000	7,000	7,000			
COMPLETE ASSEMBLY	Logan Part No.	509-704	509-707	509-708	514-520			
TOP SUB	Logan Part No.	LP1004	LP1007	LP1008	BP1025			
TOP SUB SEAL	Logan Part No.	568-275	568-279	568-280	568-390			
(SMALL)	No. Req'd	2	2	2	2			
TOP SUB SEAL	Logan Part No.	568-276	568-280	568-280	568-390			
(LARGE)	No. Req'd	1	1	1	1			
BOWL	Logan Part No.	LP2004	LP2007	LP2008	BP2020			
GUIDE	Logan Part No.	LP3004	LP3007	LP3008	BP3020			
SHEAR PINS	Logan Part No.	AC14002	AC14002	AC14008	AC14008			
	No. Req'd	2	2	2	2			
TYPE L PACKER	Logan Part No.	AT6004	AT6007	AT6008	AT6017			
	No. Req'd	4	4	4	4			
PACKER PROTECTOR	Logan Part No.	AY6004	AT7007	AT7008	BP4020			
GRAPPLE CONTROL	Logan Part No.	AY9004	AT10007	AT10008	BP5020			
GRAPPLE	Logan Part No.	AY10004	AT11007	AT11008	BP6020			

OPTIONAL

EXTENSION SUB	Logan Part No.	LPE1004	LPE1007	LPE1008	BPE1020			
<i>(5 feet long)</i>								
EXTENSION SUB SEAL	Logan Part No.	568-275	568-279	568-280	568-390			
(SMALL)	No. Req'd	2	2	2	2			
EXTENSION SUB SEAL	Logan Part No.	568-276	568-280	568-280	568-390			
(LARGE)	No. Req'd	1	1	1	1			

Logan Oil Tools reserves the right to change or discontinue designs without notice.

Notes:


- (1) H₂S casing patches available upon request.
- (2) Higher pressure casing patches of this design are available upon request.
- (3) Other sizes of casing patches are available upon request.
- (4) Casing patches can be made from special materials. Prices and delivery information is available upon request.

When ordering, please specify:

- (1) Complete assembly or part number
- (2) Size and type of connection
- (3) With or without five-foot extensions




STRENGTH DATA FOR 5-3/4" OD CASING PATCH FOR 4-1/2" CASING, ASSEMBLY NO. 509-709
7,000 MAXIMUM WORKING PRESSURE, 110K YIELD MATERIAL

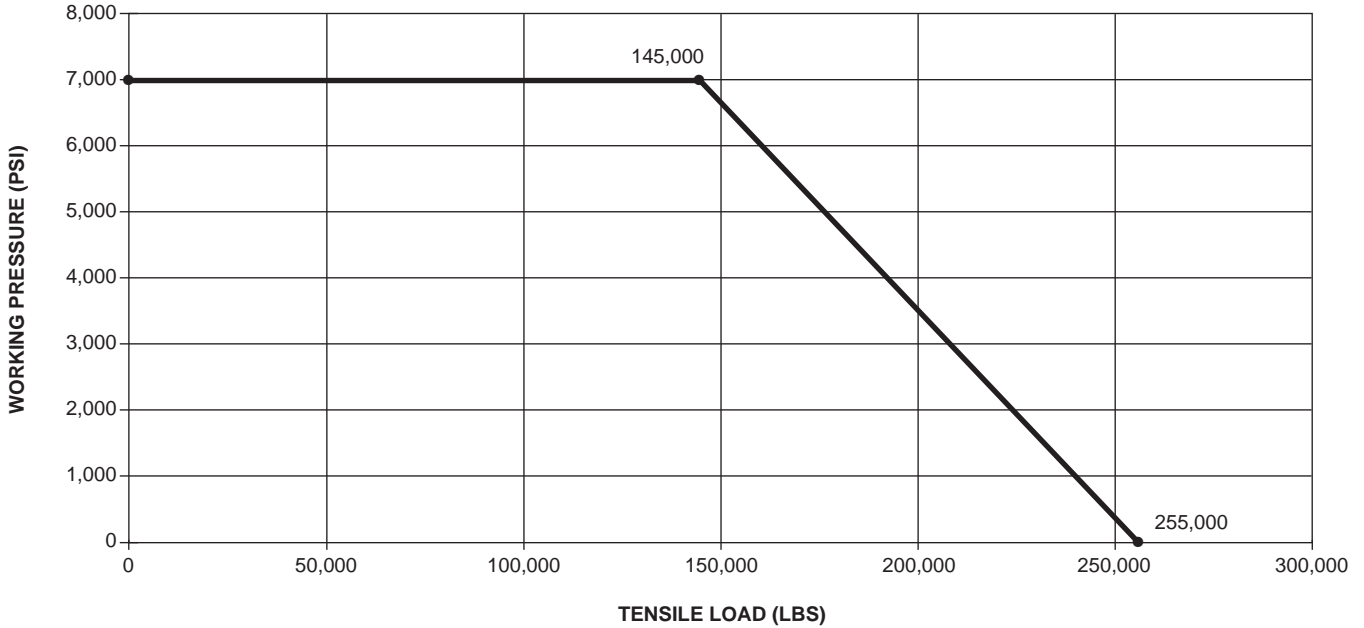

Collapse Pressure:
 7,830 psi @ 0 lbs Tensile
 4,120 psi @ 255 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 320,000 lbs
 With 10K psi Internal Pressure = 208,000,000 lbs


STRENGTH DATA FOR 6-13/16" OD CASING PATCH FOR 5-1/2" CASING, ASSEMBLY NO. 509-700
7,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

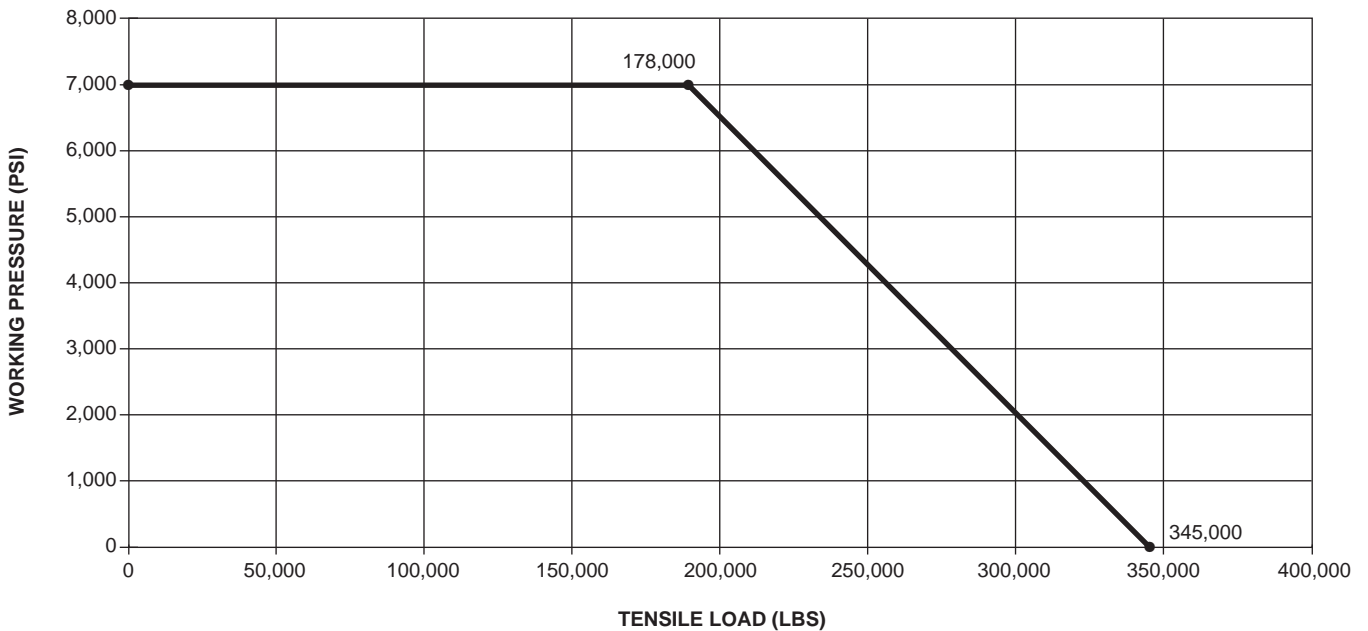

Collapse Pressure:
 8,445 psi @ 0 lbs Tensile
 5,041 psi @ 345,000 lbs Tensile

Torque:
 Top Sub to Bowl = 6,680 ft/lbs
 Bowl to Guide = 1,500 ft/lbs


STRENGTH DATA FOR 8-3/8" OD CASING PATCH FOR 7" CASING, ASSEMBLY NO. 509-711
7,000 MAXIMUM WORKING PRESSURE, 140K YIELD MATERIAL

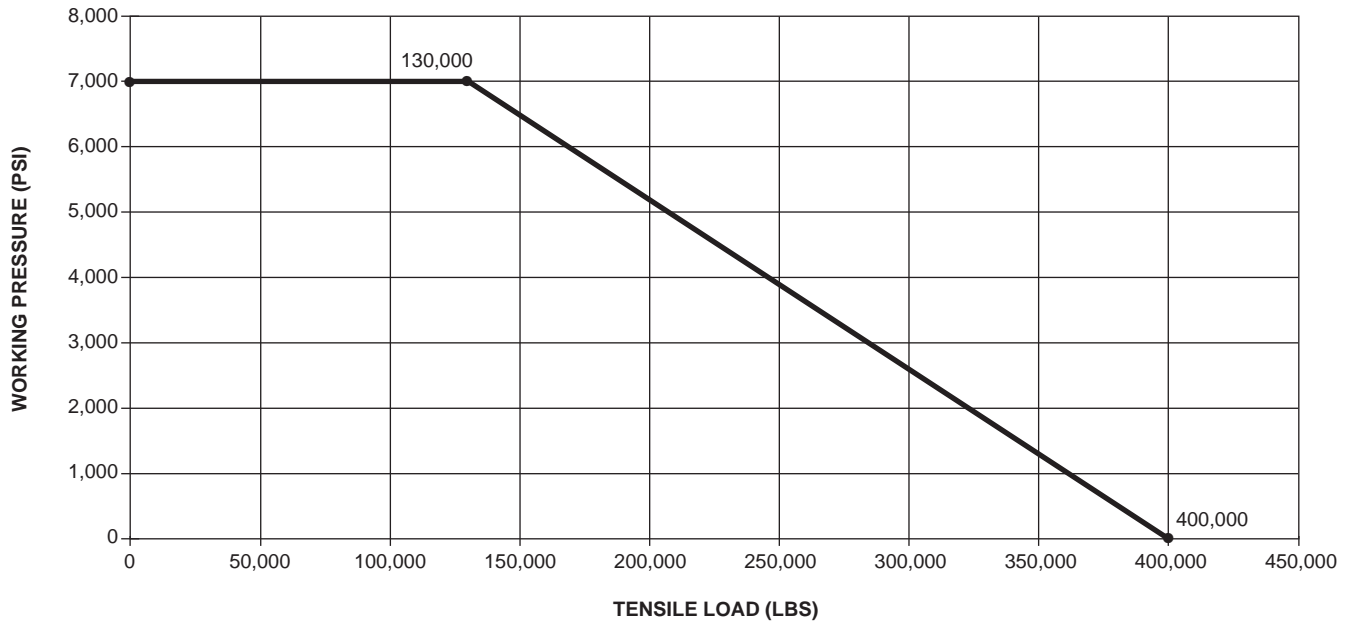

Collapse Pressure:
 7,445 psi @ 0 lbs Tensile
 5,657 psi @ 400,000 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 500,000 lbs
 With 7K psi Internal Pressure = 231,000 lbs

STRENGTH DATA FOR 9" OD CASING PATCH FOR 7-5/8" CASING, ASSEMBLY NO. 509-714
7,000 MAXIMUM WORKING PRESSURE, 140K YIELD MATERIAL

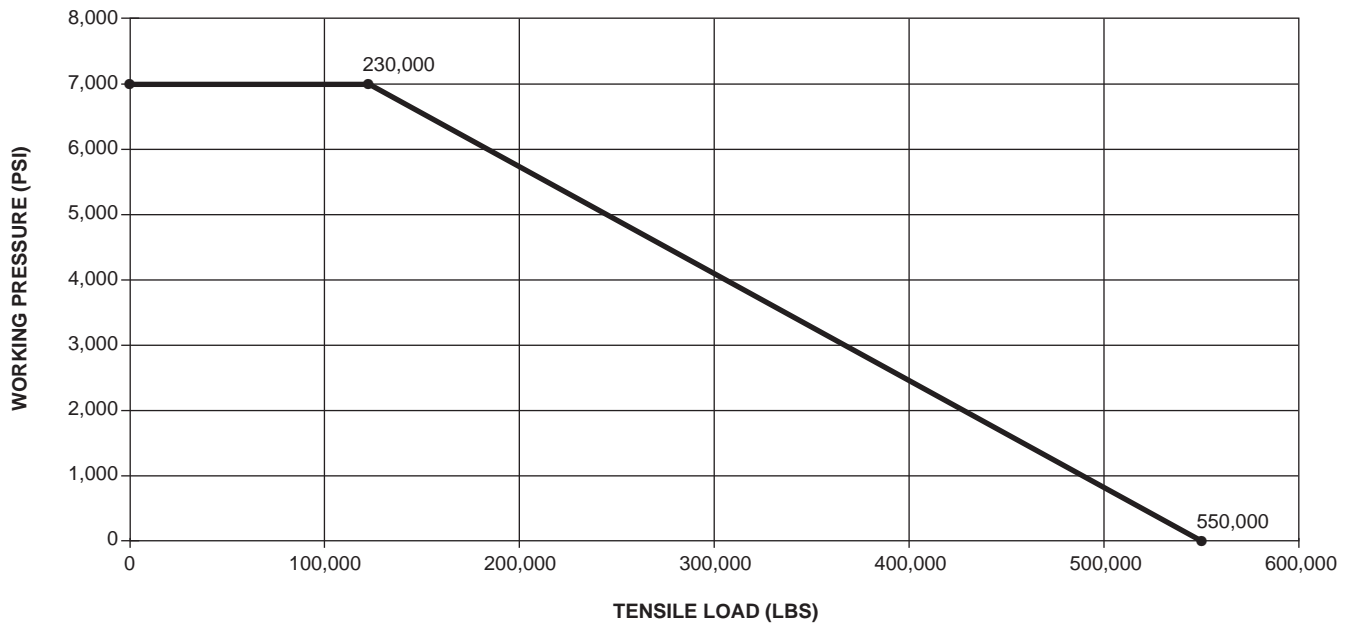


Collapse Pressure:
 7,560 psi @ 0 lbs Tensile
 4,400 psi @ 550,000 lbs Tensile

Torque:
 Maximum = 9,000 ft/lbs
 Recommended = 4,500 ft/lbs



STRENGTH DATA FOR 11-1/4" OD CASING PATCH FOR 9-5/8" CASING, ASSEMBLY NO. 503L-014
7,000 MAXIMUM WORKING PRESSURE, 110K YIELD MATERIAL

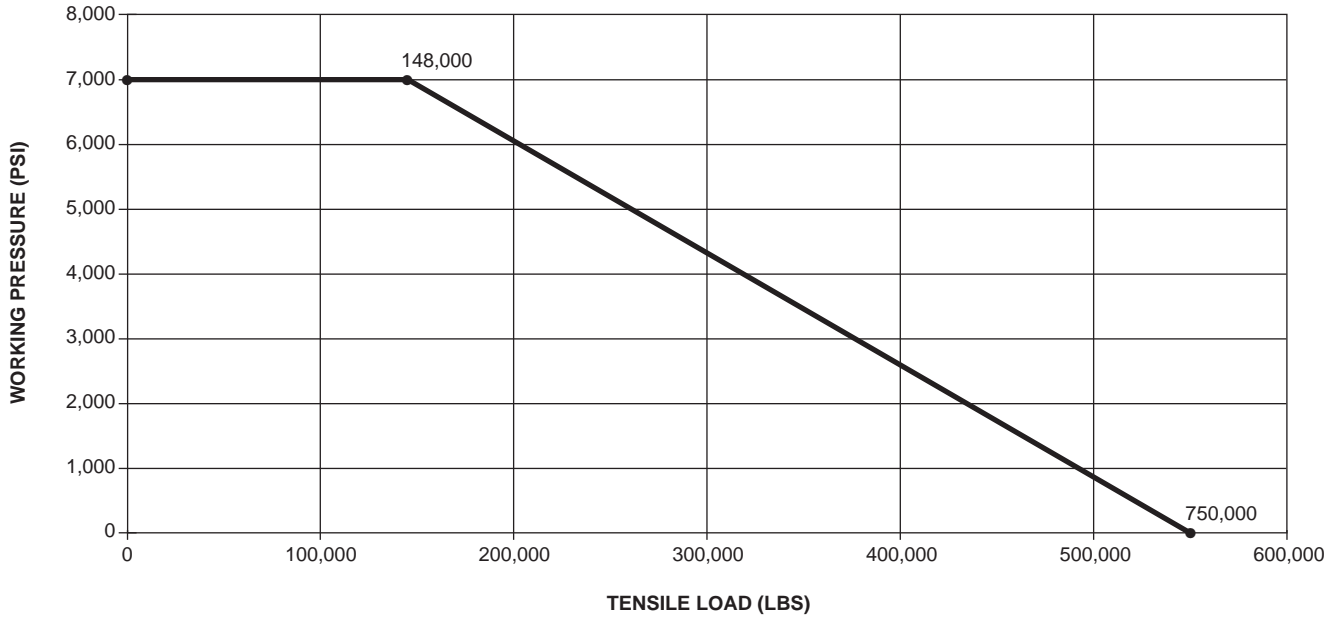


Collapse Pressure:
 6,796 psi @ 0 lbs Tensile
 6,393 psi @ 148,000 lbs Tensile

Torque:
 Top Sub to Bowl = 15,000 ft/lbs
 Bowl to Guide = 7,500 ft/lbs

Burst Pressure:
 8,800 psi

STRENGTH DATA FOR 11-9/16" OD CASING PATCH FOR 9-7/8" CASING, ASSEMBLY NO. 509-703
7,000 MAXIMUM WORKING PRESSURE, 110K YIELD MATERIAL

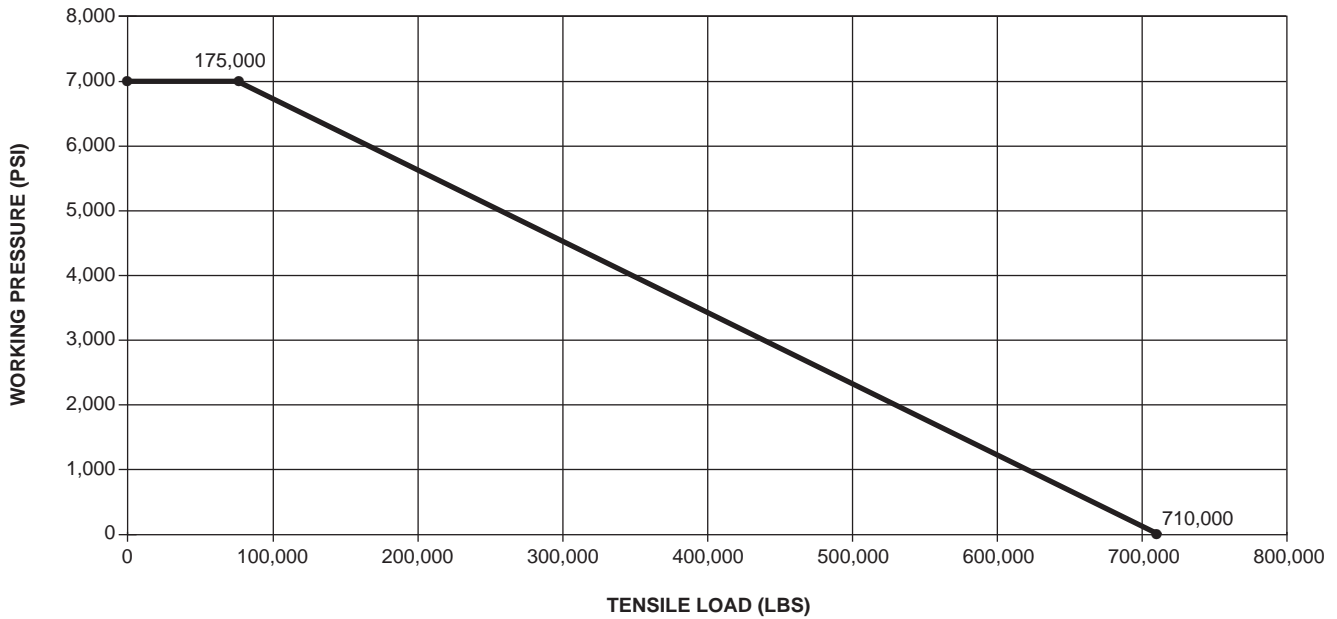


Collapse Pressure:
 7,269 psi @ 0 lbs
 4,957 psi @ 711,120 lbs

Tensile Strength @ Yield:
 Tensile Strength w/0 Int. Pressure = 911,020 lbs
 Tensile Strength w/ 7K Int. Pressure = 352,780 lbs



STRENGTH DATA FOR 12.312" OD CASING PATCH FOR 10-3/4" CASING, ASSEMBLY NO. 509-704
6,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

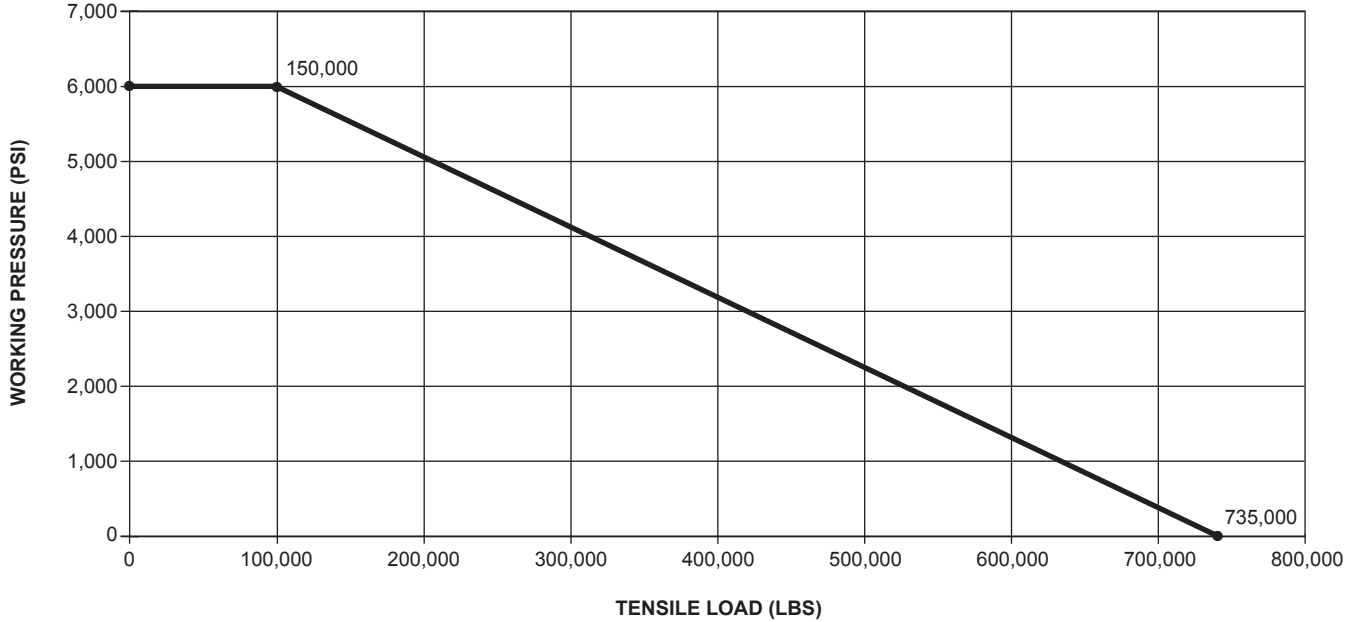


Collapse Pressure:
 6,482 psi @ 0 lbs Tensile
 4,362 psi @ 735,000 lbs Tensile

Torque:
 Top Sub to Bowl = 5,000 ft/lbs
 Bowl to Guide = 1,500 ft/lbs

Burst Pressure:
 9,794 psi

STRENGTH DATA FOR 15-1/2" OD CASING PATCH FOR 13-3/8" CASING, ASSEMBLY NO. 509-707
7,000 MAXIMUM WORKING PRESSURE, 18" MINIMUM GRAPPLE LENGTH

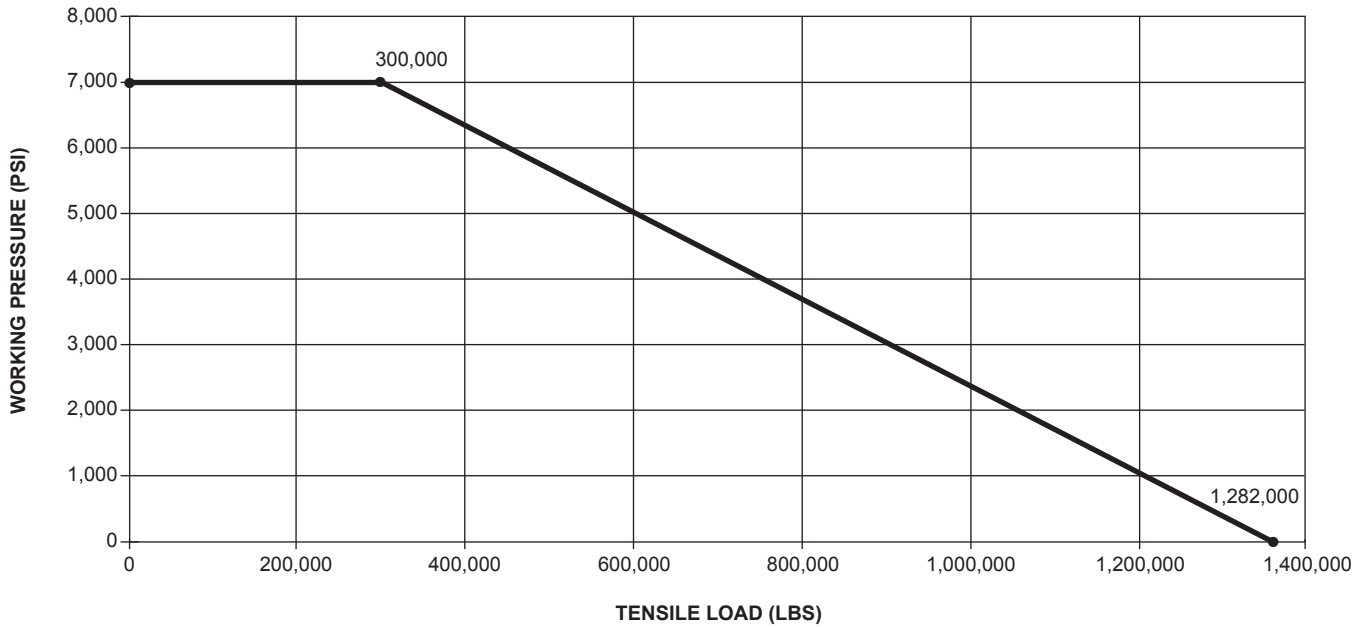


Collapse Pressure:
 8,428 psi @ 0 lbs Tensile
 5,396 psi @ 1,465,000 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 1,825,991 lbs
 With 7K psi Internal Pressure = 841,753 lbs

Torque:
 Top Sub to Bowl = 12,000 ft/lbs
 Bowl to Guide = 4,000 ft/lbs




STRENGTH DATA FOR 15-3/4" OD CASING PATCH FOR 13-5/8" CASING, ASSEMBLY NO. 509-708
7,000 MAXIMUM WORKING PRESSURE, 110K YIELD MATERIAL

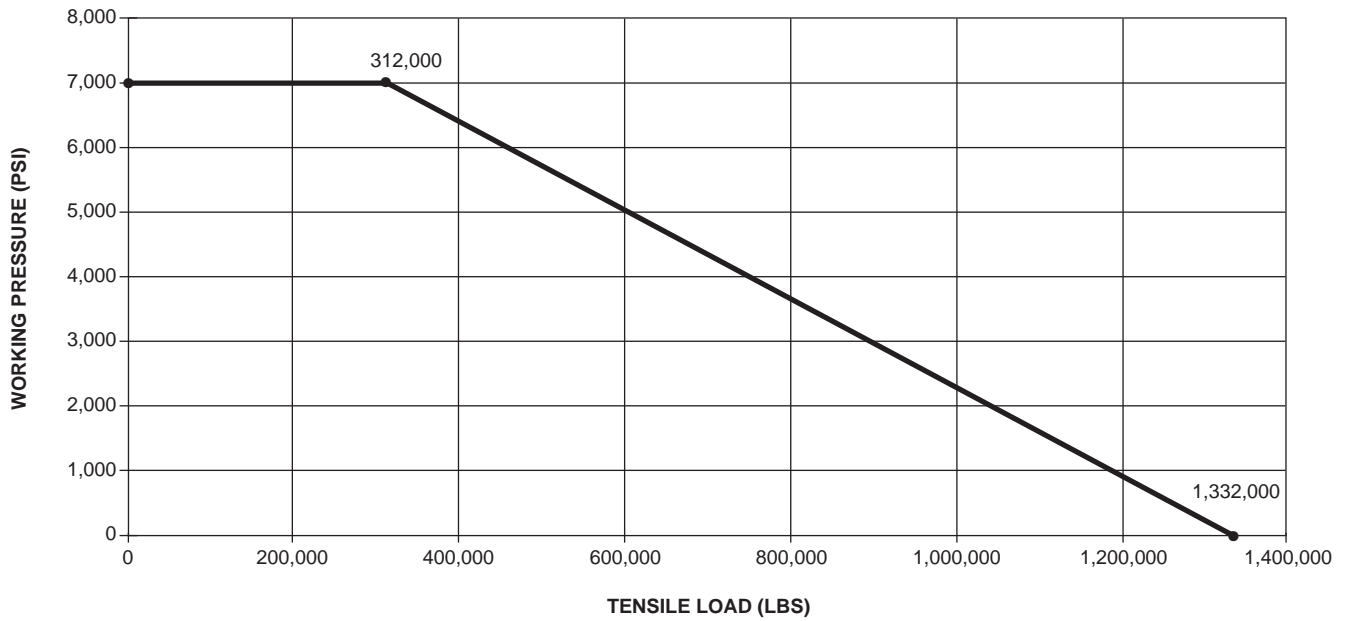

Collapse Pressure:
 7,945 psi @ 0 lbs Tensile
 5,664 psi @ 1,332,000 lbs Tensile

Tensile Strength @ Yield:
 Top Sub to Bowl = 12,000 ft/lbs
 Bowl to Guide = 4,500 ft/lbs

STRENGTH DATA FOR 23-1/2" OD CASING PATCH FOR 20" CASING, ASSEMBLY NO. 514-520
7,000 MAXIMUM WORKING PRESSURE

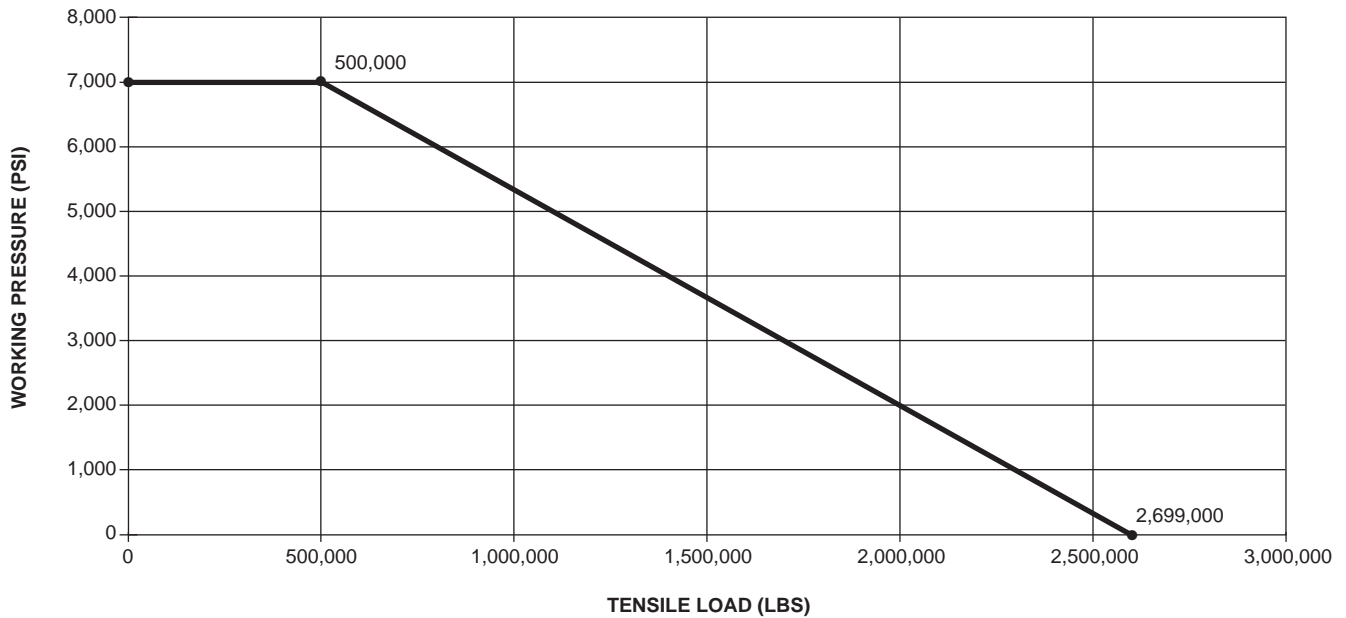

Collapse Pressure:
 9,018 psi @ 0 lbs Tensile
 7,936 psi @ 1,174,778 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 3,373,893 lbs
 With 10K psi Internal Pressure = 1,174,778 lbs

Torque:
 Top Sub to Bowl = 25,000 ft/lbs
 Bowl to Guide = 8,500 ft/lbs



LOGAN HIGH PRESSURE TYPE L PACKER TYPE CASING PATCH - 10,000 PSI

O.D. CASING		4-1/2	5-1/2	7	9-5/8	9-7/8	10-3/4	13-3/8
O.D. PATCH		5-7/8	7	8-5/8	11.43	11-3/4	12-3/4	15-5/8
PRESSURE RATING (PSI)		10,000	10,000	10,000	10,000	10,000	10,000	10,000
COMPLETE ASSEMBLY	Logan Part No.	510L-005	510L-007	510L-011	510-963-010	510-1175-010	510-1275-010	510-1338
TOP SUB	Logan Part No.	ZL1005-10	ZL1007-10	ZL1011-10	BT1002-010	BT1003-010	BT2004-010	BT2007-010
TOP SUB SEAL (SMALL)	Logan Part No.	568248-200	568257-200	568263-200	568274-200	568274-400	568275-200	568279-200
	No. Req'd	2	2	2	2	2	2	2
TOP SUB SEAL (LARGE)	Logan Part No.	568251-200	568257-200	568265-200	568274-200	568275-400	568276-200	568280-200
	No. Req'd	1	1	1	1	1	1	1
BOWL	Logan Part No.	ZL2005-10	ZL2007-10-001	ZL2011-10	BT12002-010	BT2003-010	BT11004-010	BT11007-010
GUIDE	Logan Part No.	Z7005-10	ZL3007-10	Z7011-10	BT13002-010	BT3003-010	BT12004-010	BT12007-010
SHEAR PINS	Logan Part No.	AC14002	AC14002	AC14002	AC14008	AC14002	AC14008	AC14000
	No. Req'd	2	2	2	2	2	2	2
TYPE L PACKER	Logan Part No.	AT6009	AT6000	AT6001	AT6002	AT6003	AT6004	AT6007
	No. Req'd	4	4	4	4	4	4	4
PACKER PROTECTOR	Logan Part No.	ZL3005	ZL3007-10	ZL3011	AT7002	AT7003	AY6004-500	AT7007
GRAPPLE CONTROL	Logan Part No.	Z6005 *	ZL6007	Z6011	AT10002	AT10003	AY9004	AT10007
GRAPPLE	Logan Part No.	Z5005	ZL5007	Z5011	AT11002	AT11003	AY10004	AT11007

OPTIONAL

EXTENSION SUB (5 feet long)	Logan Part No.	ZLE1005-10	ZLE1007-10	ZLE1011-10	BT3002-010	BTE1003-010	BTE3004-010	BT3007-010
EXTENSION SUB SEAL (SMALL)	Logan Part No.	568248-200	568257-200	568263-200	568274-200	568274-400	568275-200	568279-200
	No. Req'd	2	2	2	2	2	2	2
EXTENSION SUB SEAL (LARGE)	Logan Part No.	568251-200	568257-200	568265-200	568274-200	568275-400	568276-200	568280-200
	No. Req'd	1	1	1	1	1	1	1

Logan Oil Tools reserves the right to change or discontinue designs without notice.

* Mill Control Packer instead of Grapple Control

Notes:


- (1) H₂S casing patches available upon request.
- (2) Higher pressure casing patches of this design are available upon request.
- (3) Other sizes of casing patches are available upon request.
- (4) Casing patches can be made from special materials. Prices and delivery information is available upon request.

When ordering, please specify:

- (1) Complete assembly or part number
- (2) Size and type of connection
- (3) With or without five-foot extensions




STRENGTH DATA FOR 5-7/8" OD CASING PATCH FOR 4-1/2" CASING, ASSEMBLY NO. 510L-005
10,000 MAXIMUM WORKING PRESSURE, 110K YIELD MATERIAL

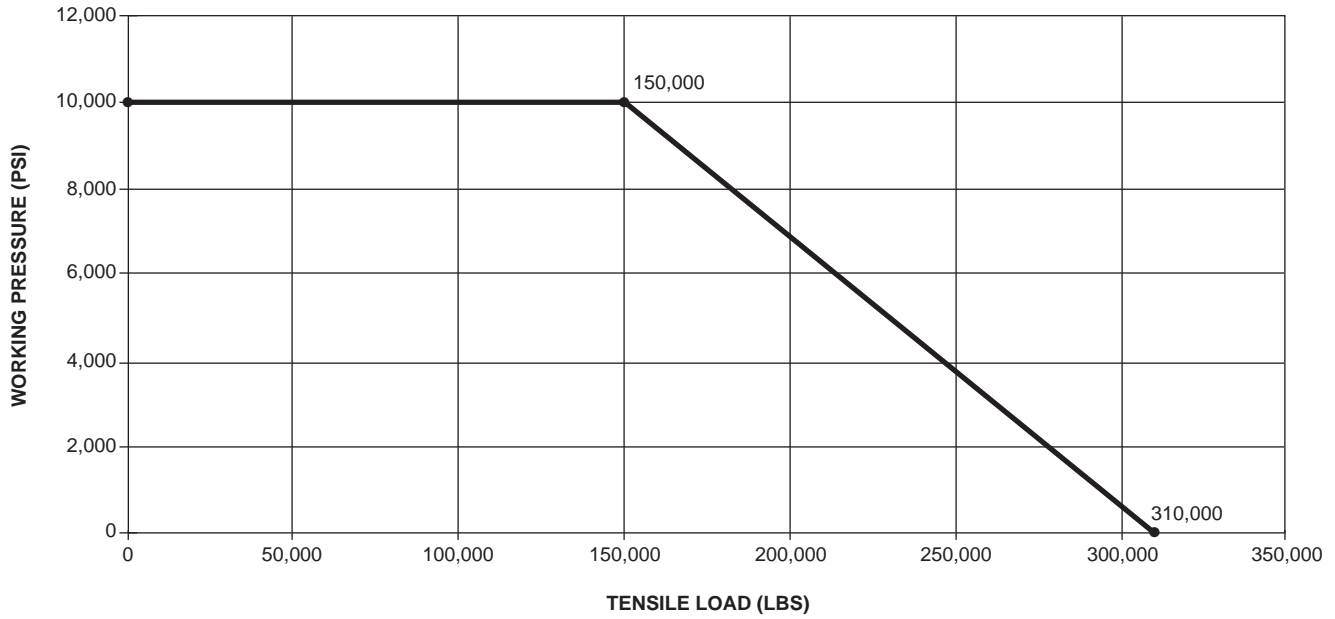

Collapse Pressure:
 9,892 psi @ 0 lbs Tensile
 5,715 psi @ 310,000 lbs Tensile

Torque:
 Maximum = 8,500 ft/lbs
 Recommended = 4,400 ft/lbs

STRENGTH DATA FOR 7" OD CASING PATCH FOR 5-1/2" CASING, ASSEMBLY NO. 510L-007
10,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

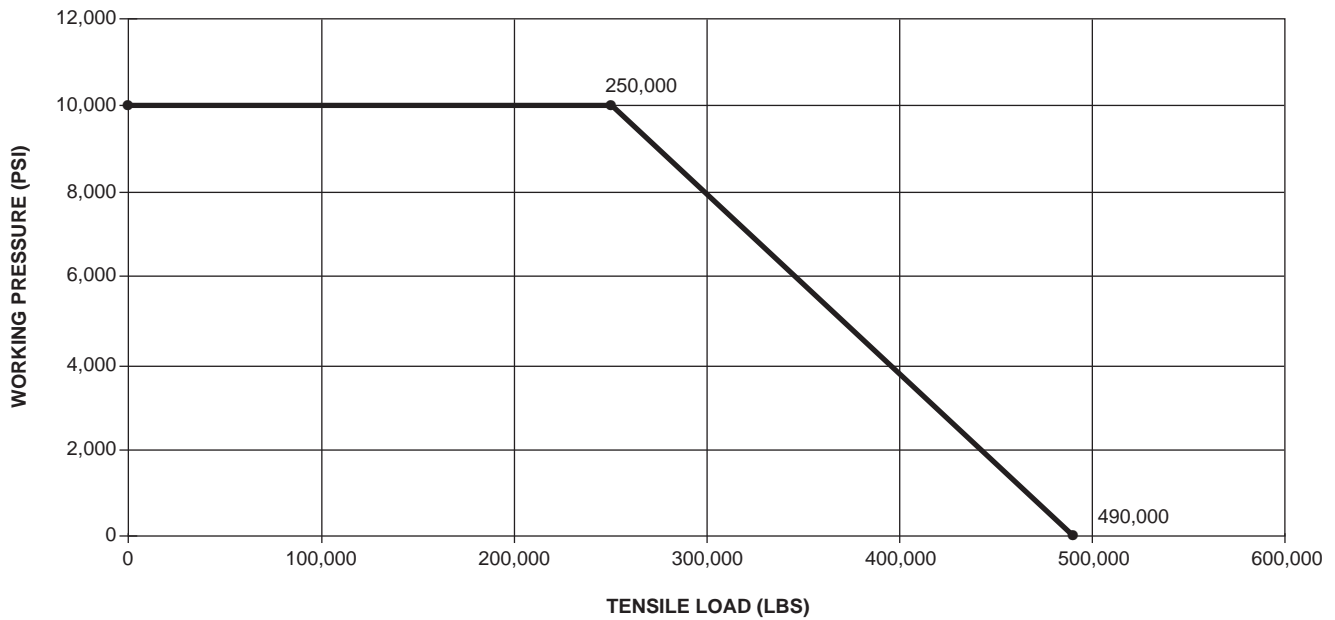


Collapse Pressure:
 11,310 psi @ 0 lbs Tensile
 6,693 psi @ 490,000 lbs Tensile

Torque:
 Top Sub to Bowl = 6,680 ft/lbs
 Bowl to Guide = 1,500 ft/lbs




STRENGTH DATA FOR 8-5/8" OD CASING PATCH FOR 7" CASING, ASSEMBLY NO. 510L-011
10,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

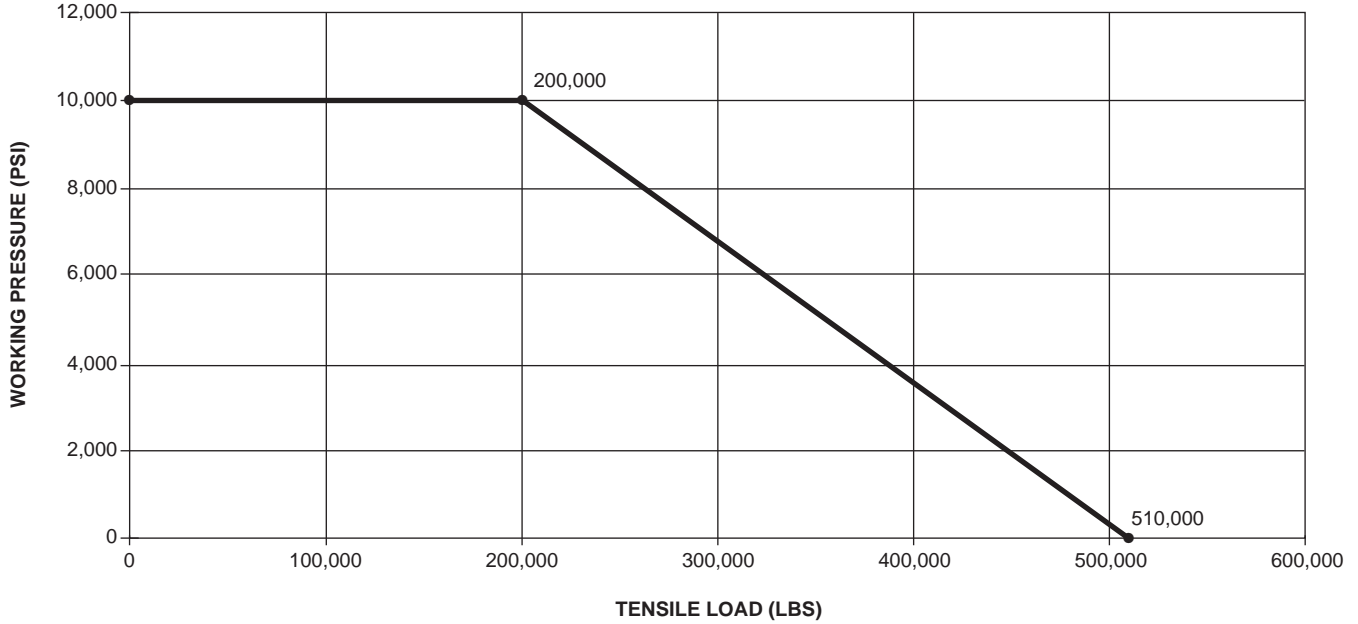

Collapse Pressure:
 10,910 psi @ 0 lbs Tensile
 8,063 psi @ 510,000 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 650,000 lbs
 With 10K psi Internal Pressure = 215,000 lbs

STRENGTH DATA FOR 11.43" OD CASING PATCH FOR 9-5/8" CASING, ASSEMBLY NO. 510-963-010-002
10,000 MAXIMUM WORKING PRESSURE, 125K YIELD MAT'L

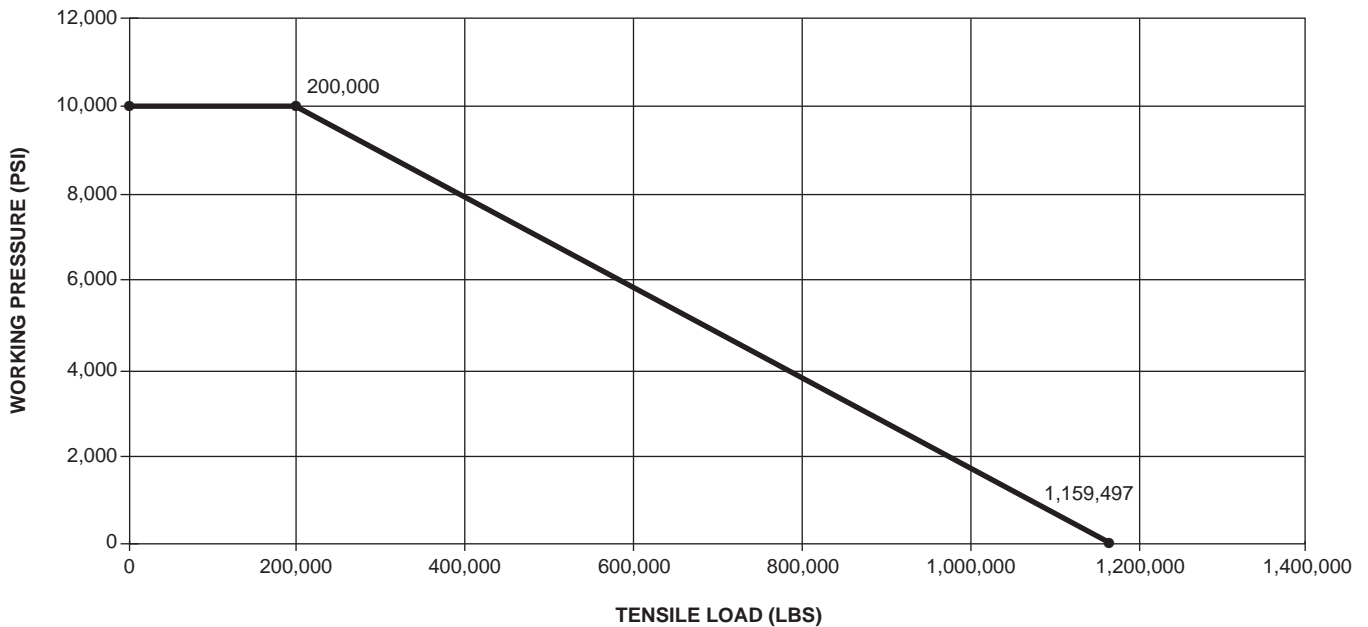


Collapse Pressure:
 9,556 psi @ 0 lbs Tensile
 4,002 psi @ 1,159,497 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 1,159,497 lbs
 With 10K psi Internal Pressure = 439,899 lbs

Top Sub to Bowl = 28,335 ft/lbs
 Bowl to Guide = 16,604 ft/lbs




STRENGTH DATA FOR 11-3/4" OD CASING PATCH FOR 9-7/8" CASING, ASSEMBLY NO. 510-1175-010
10,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

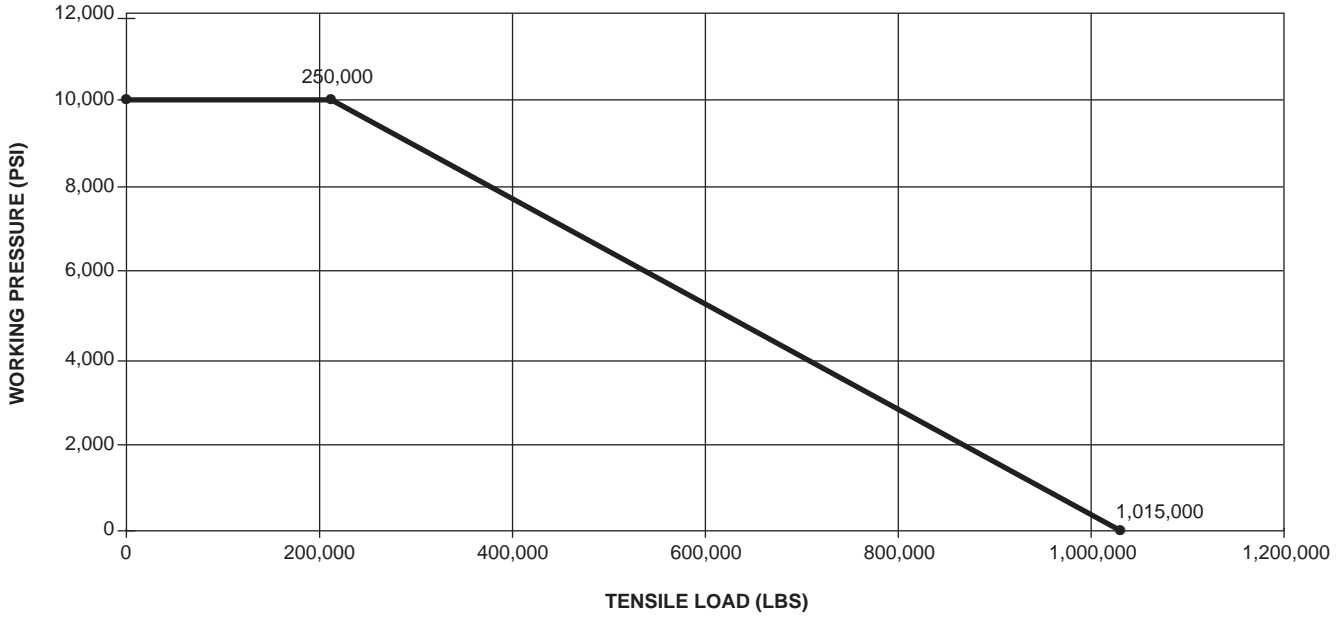

Collapse Pressure:
 9,990 psi @ 0 lbs Tensile
 6,787 psi @ 1,015,885 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 1,269,857 lbs
 With 10K psi Internal Pressure = 503,971 lbs

STRENGTH DATA FOR 12-3/4" OD CASING PATCH FOR 10-3/4" CASING, ASSEMBLY NO. 510-1275-010
10,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

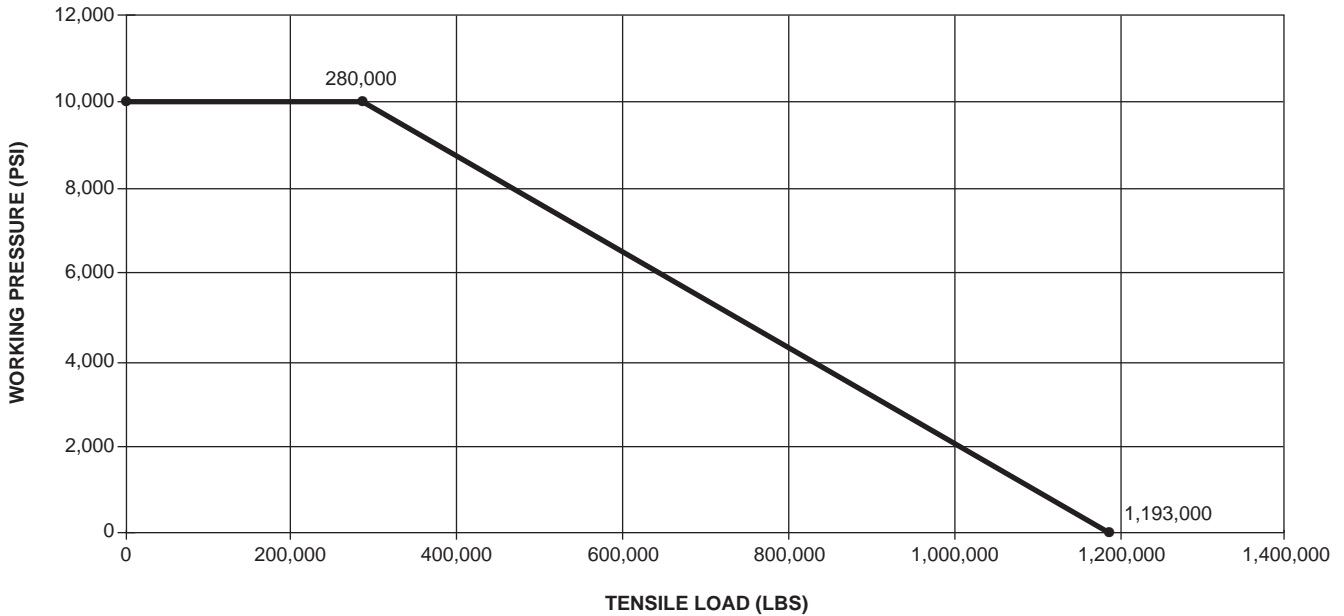


Collapse Pressure:
 10,265 psi @ 0 lbs Tensile
 9,153 psi @ 496,835 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 1,400,000 lbs
 With 10K psi Internal Pressure = 496,835 lbs



STRENGTH DATA FOR 15-5/8" OD CASING PATCH FOR 13-3/8" CASING, ASSEMBLY NO. 510-1338

10,000 MAXIMUM WORKING PRESSURE

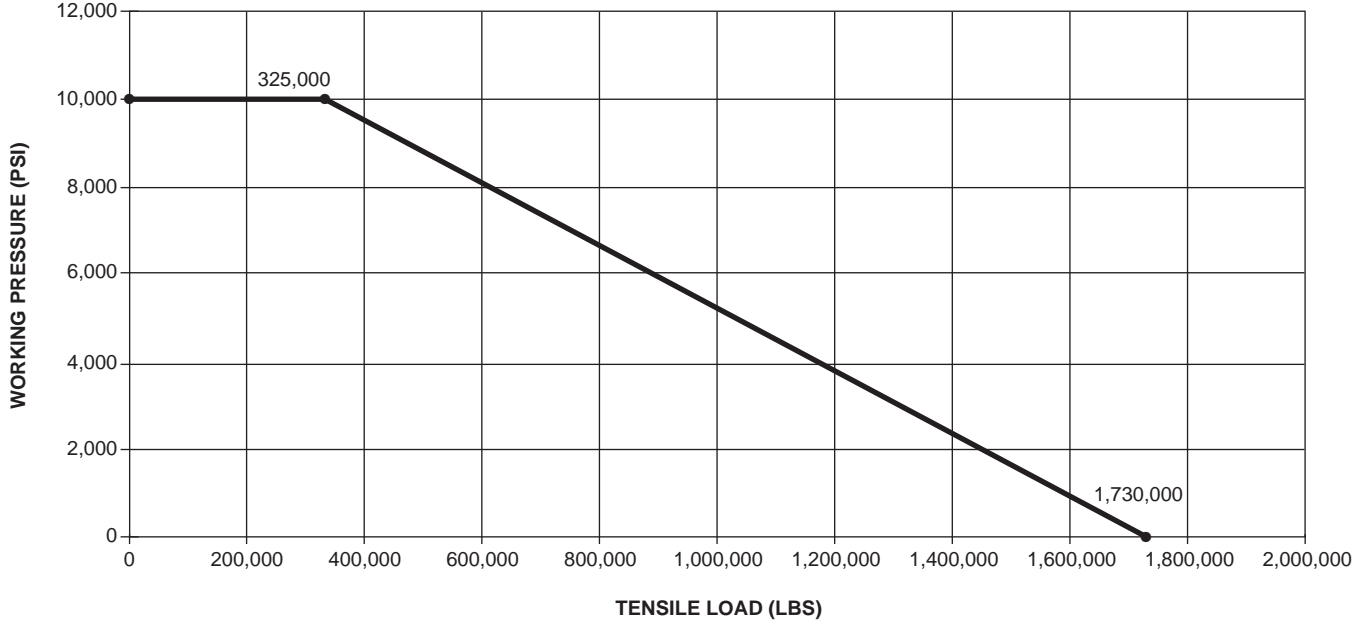

Collapse Pressure:

10,037 psi @ 0 lbs Tensile
6,986 psi @ 1,730,000 lbs Tensile

Tensile Strength @ Yield:

With 0 psi Internal Pressure = 2,038,725 lbs
With 10K psi Internal Pressure = 633,721 lbs



LOGAN HIGH PRESSURE TYPE L PACKER TYPE CASING PATCH - 12,000 PSI

O.D. CASING		5-1/2	9-5/8	9-7/8	10-3/4	11-3/4	13-3/8	13-5/8
O.D. PATCH		7-1/8	11-5/8	11-7/8	12-7/8	14-3/8	15-3/4	16-1/8
PRESSURE RATING (PSI)		12,000	12,000	12,000	12,000	12,000	12,000	12,000
COMPLETE ASSEMBLY	Logan Part No.	512-550-012	512-963-012	507-1188-12K	507-1288-012	507-1438-12K-500	507-1544-012-500	512-1363
TOP SUB	Logan Part No.	AT1000-12	AT1002-012	AY2003-12K	*	AY2006-12K-500	AY2007-012	AT1008-012
TOP SUB SEAL (SMALL)	Logan Part No.	568257-200	568273-200	568274-200	*	568278-200	568279-200	568279-200
	No. Req'd	2	2	2	2	2	2	2
TOP SUB SEAL (LARGE)	Logan Part No.	568257-200	568273-200	568275-200	*	568278-200	568280-200	568280-200
	No. Req'd	1	1	1	1	1	1	1
BOWL	Logan Part No.	AT12000-12	AT12002-012	AY11003-12K-500	*	AY11006-12K-500	AY11007-012-502	AT12008-012
GUIDE	Logan Part No.	AT13000-12	AT13002-012	AY12003-12K-500	*	AY12006-12K-500	AY12007-012-502	AT13008-012
SHEAR PINS	Logan Part No.	AC14002	AC14002	AC14002	*	AC14002	AC14008	AC14008
	No. Req'd	2	2	2	2	2	2	2
TYPE L PACKER	Logan Part No.	AT6000	AT6002	AT6003	AT6004	AT6006	AT6004	AT6008
	No. Req'd	4	4	4	4	4	4	4
PACKER PROTECTOR	Logan Part No.	ZL3007	AT7002	AY6003-500	*	AY6006-12K-500	AY6007-012-502	AT7008
GRAPPLE CONTROL	Logan Part No.	Z6007	AT10002	AY9003-500	*	AY9006-12K-500	AY9007-501	AT10008
GRAPPLE	Logan Part No.	Z5007	AT11002	AY10003	*	AY10006	AY10007-502	AT11008

OPTIONAL

EXTENSION SUB (5 feet long)	Logan Part No.	AT3000-12	AT3002-012	AY3003-12K-500	*	AY3006-12K-500	AY3007-012-502	AT3008-012
EXTENSION SUB SEAL (SMALL)	Logan Part No.	568257-200	568273-200	568274-200	*	568278-200	568279-200	568279-200
	No. Req'd	2	2	2	2	2	2	2
EXTENSION SUB SEAL (LARGE)	Logan Part No.	568257-200	568273-200	568275-200	*	568278-200	568280-200	568280-200
	No. Req'd	1	1	1	1	1	1	1

Logan Oil Tools reserves the right to change or discontinue designs without notice.

* Part numbers available upon request

Notes:


- (1) H₂S casing patches available upon request.
- (2) Higher pressure casing patches of this design are available upon request.
- (3) Other sizes of casing patches are available upon request.
- (4) Casing patches can be made from special materials. Prices and delivery information is available upon request.

When ordering, please specify:

- (1) Complete assembly or part number
- (2) Size and type of connection
- (3) With or without five-foot extensions




STRENGTH DATA FOR 7-1/8" OD CASING PATCH FOR 5-1/2" CASING, ASSEMBLY NO. 512-550-012
12,000 MAXIMUM WORKING PRESSURE, 140K YIELD MATERIAL

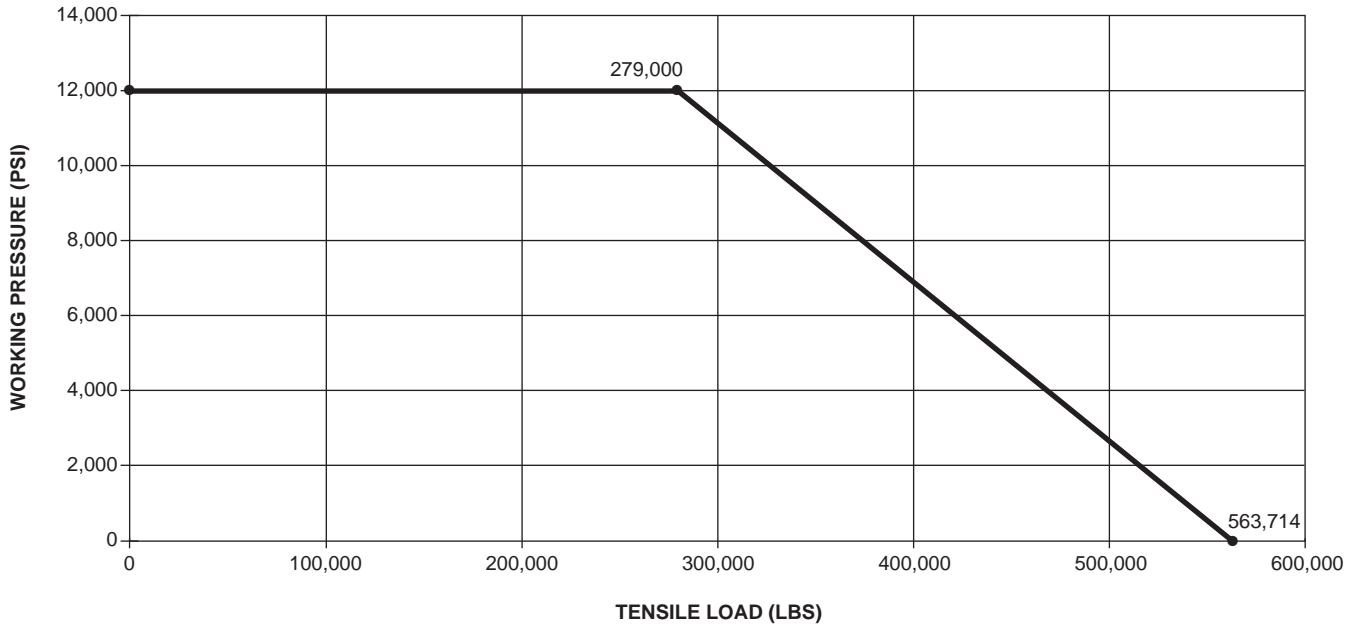

Collapse Pressure:
 14,727 psi @ 0 lbs Tensile
 9,863 psi @ 565,000 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 663,193 lbs
 With 10K psi Internal Pressure = 378,093 lbs

STRENGTH DATA FOR 11-5/8" OD CASING PATCH FOR 9-5/8" CASING, ASSEMBLY NO. 512-963-012
12,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

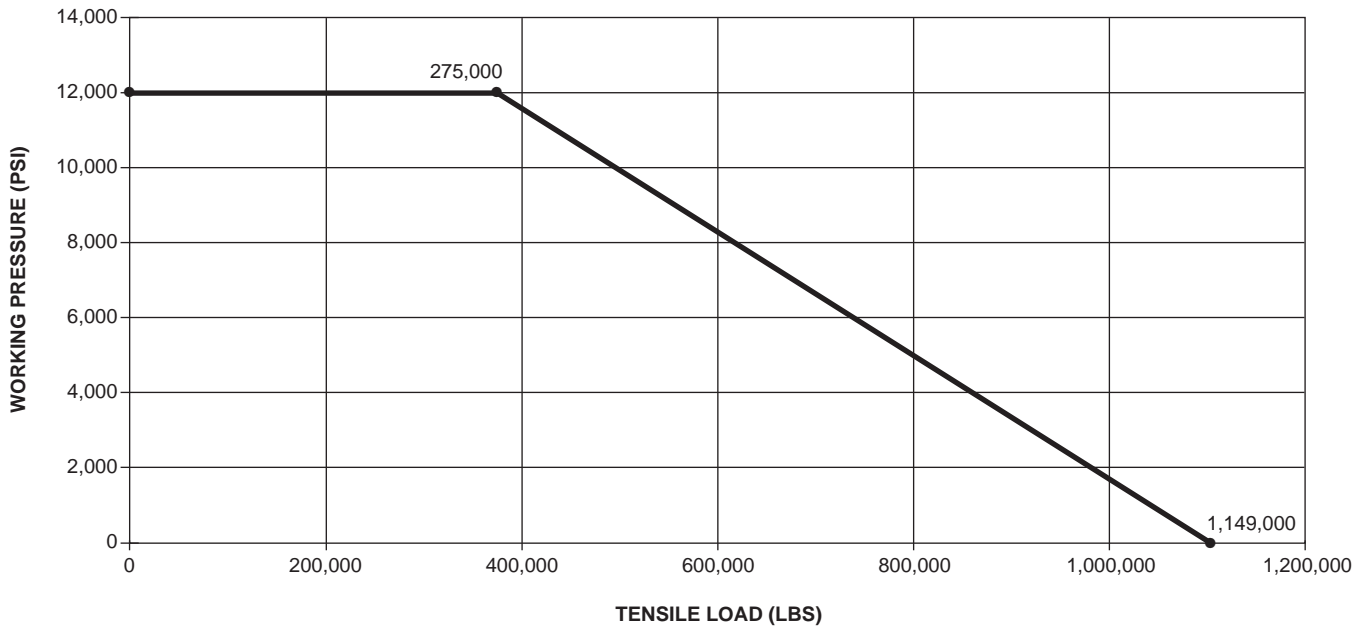


Collapse Pressure:
 11,380 psi @ 0 lbs Tensile
 7,667 psi @ ? lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 1,436,280 lbs
 With 12K psi Internal Pressure = 562,256 lbs

Torque @ Yield = 77,106 ft/lbs
 Top Sub to Bowl = 24,500 ft/lbs
 Bowl to Guide = 13,500 ft/lbs




STRENGTH DATA FOR 11-7/8" OD CASING PATCH FOR 9-7/8" CASING, ASSEMBLY NO. 507-1188-12K
12,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

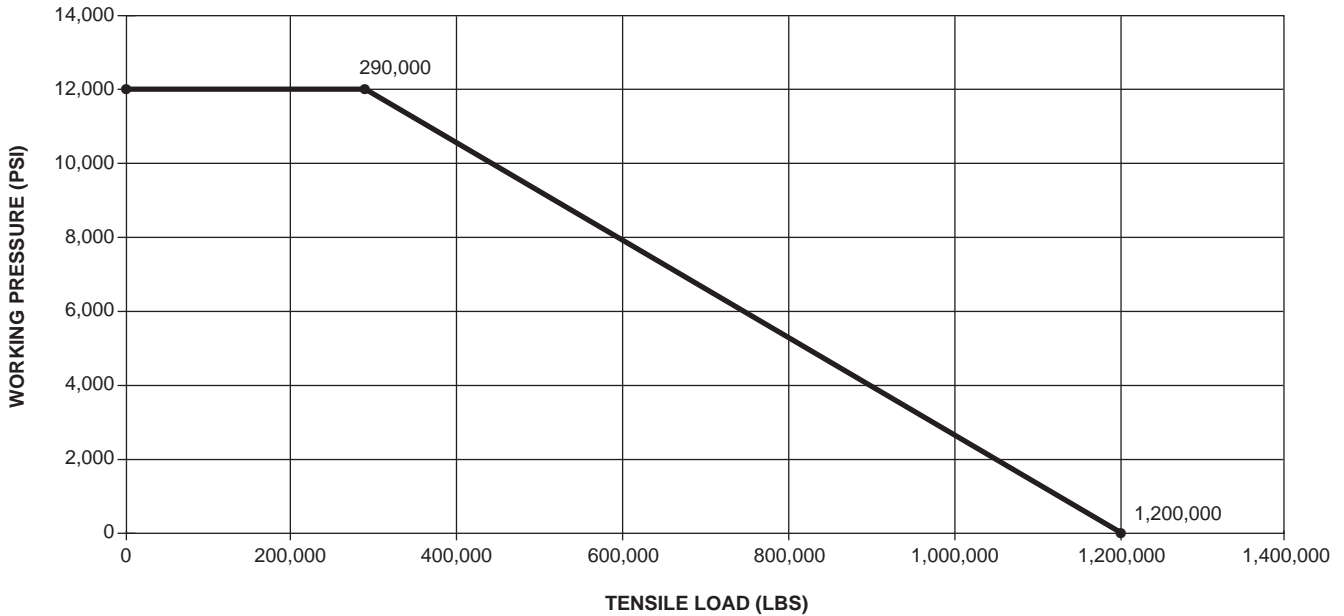

Collapse Pressure:
 12,428 psi @ 0 lbs Tensile
 8,019 psi @ 1,015,885 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 1,606,620 lbs
 With 12K psi Internal Pressure = 733,503 lbs

STRENGTH DATA FOR 12-7/8" OD CASING PATCH FOR 10-3/4" CASING, ASSEMBLY NO. 507-1288-012
12,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

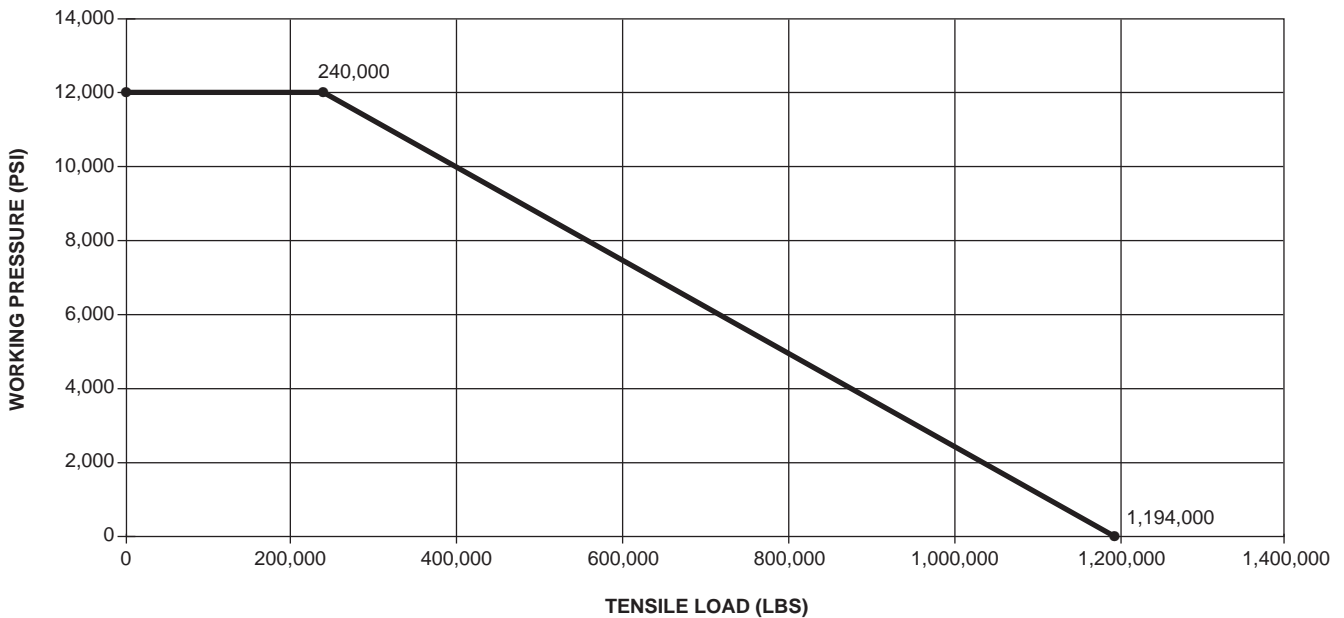


Collapse Pressure:
 11,314 psi @ 0 lbs Tensile
 7,854 psi @ 1,332,538 lbs Tensile

Tensile Strength @ Yield:
 With 0 psi Internal Pressure = 1,568,000 lbs
 With 10K psi Internal Pressure = 478,541 lbs



STRENGTH DATA FOR 14-3/8" OD CASING PATCH FOR 11-7/8" CASING, ASSEMBLY NO. 507-1438-12K-500
12,000 MAXIMUM WORKING PRESSURE, 125K YIELD MATERIAL

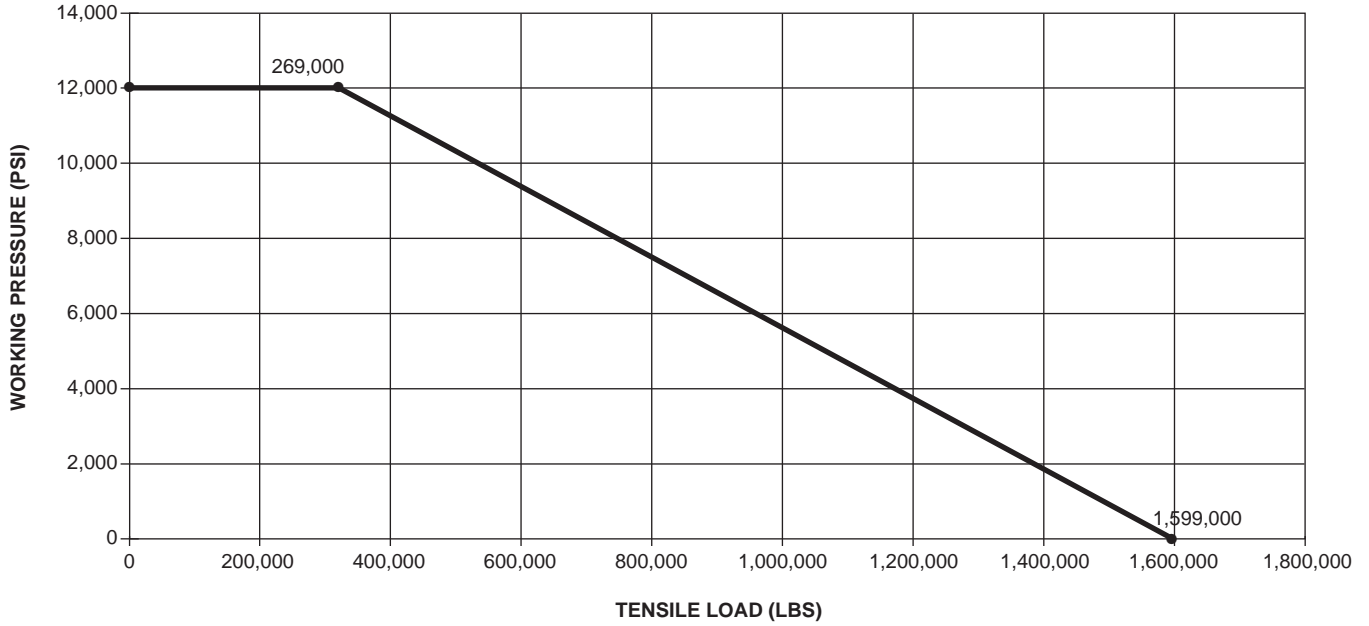


Collapse Pressure:

13,134 psi @ 0 lbs Tensile
 10,410 psi @ 1,599,000 lbs Tensile

Torque:

Maximum = 14,720 ft/lbs
 Recommended = 7,500 ft/lbs
 Guide = 3,500 ft/lbs

STRENGTH DATA FOR 15-3/4" OD CASING PATCH FOR 13-3/8" CASING, ASSEMBLY NO. 507-1544-012-500
12,000 MAXIMUM WORKING PRESSURE

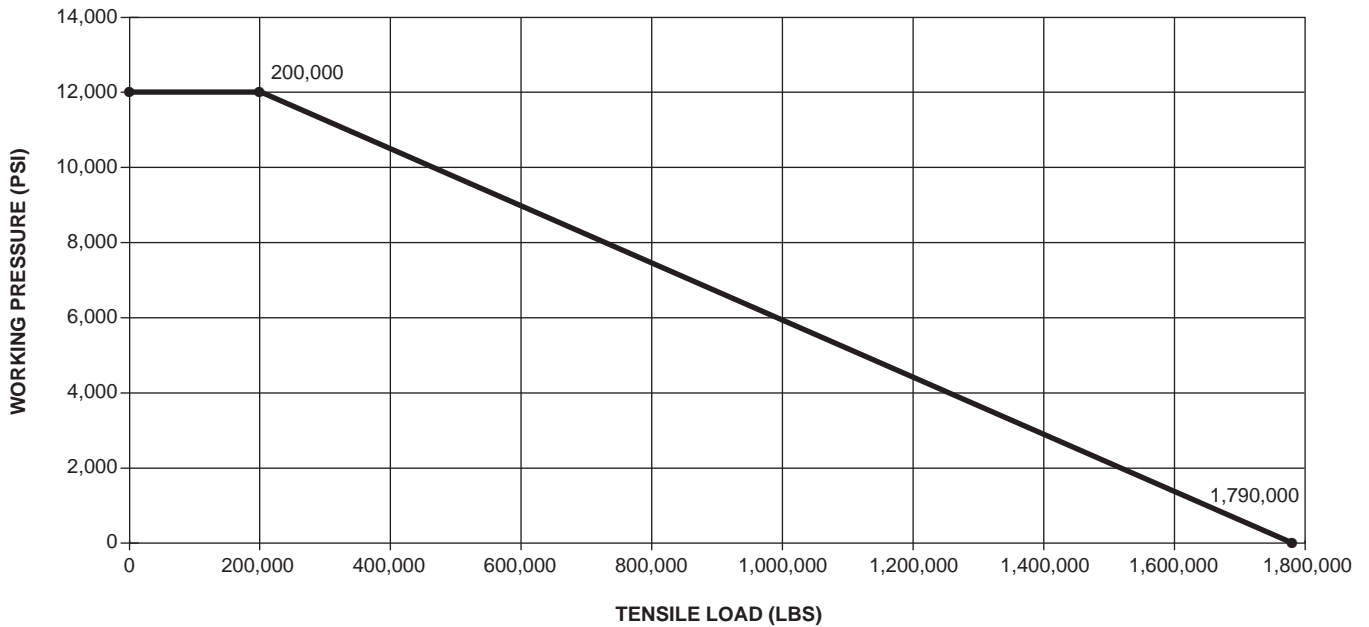

Collapse Pressure:


12,676 psi @ 0 lbs Tensile
 8,378 psi @ 1,790,000 lbs Tensile

Tensile Strength @ Yield:

With 0 psi Internal Pressure = 2,239,373 lbs
 With 12K psi Internal Pressure = 572,874 lbs



STRENGTH DATA FOR 16-1/8" OD CASING PATCH FOR 13-5/8" CASING, ASSEMBLY NO. 512-1363
12,000 MAXIMUM WORKING PRESSURE

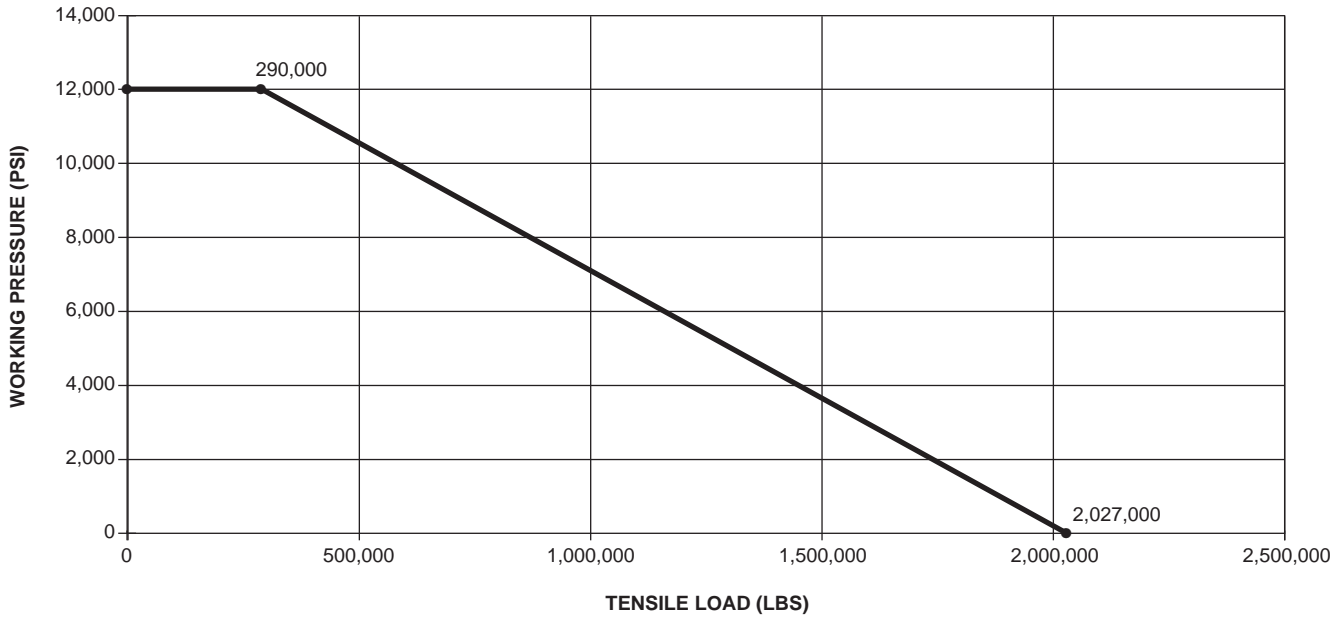

Collapse Pressure:


11,500 psi @ 0 lbs Tensile
8,000 psi @ 2,027,443 lbs Tensile

Torsional Strength:

Torsional Strength @ Yield = 385,208 ft/lbs
Recommended Make Up Torque = 15,760 ft/lbs

Burst Pressure:

18,812 psi

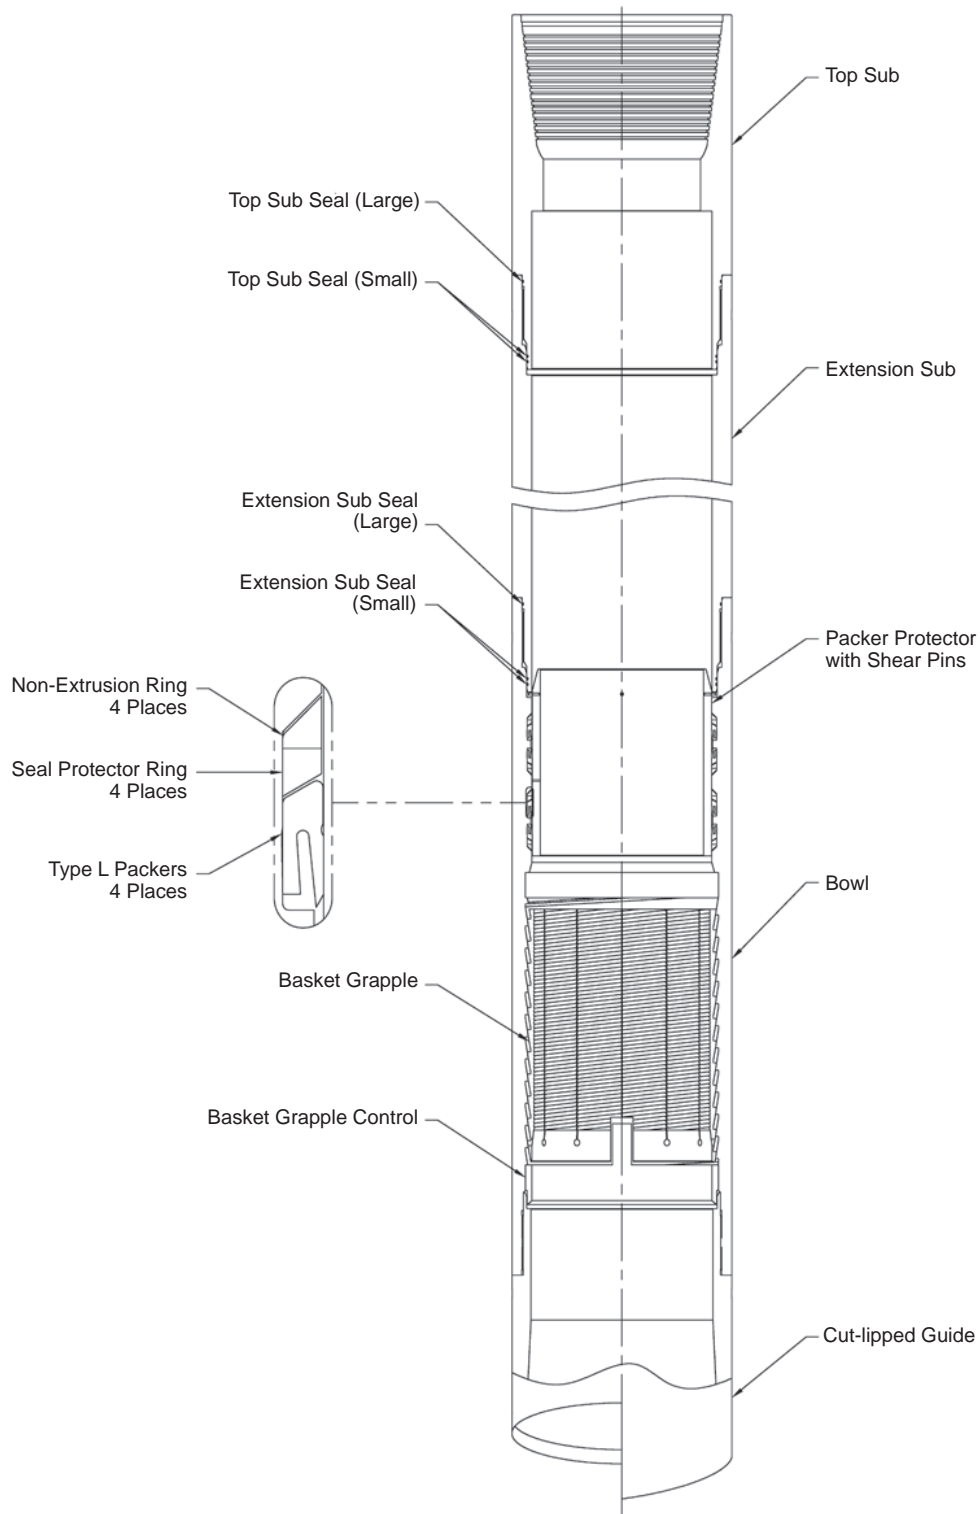

**Logan Type L Packer Type Casing Patch
15K Assembly**

Logan Oil Tools reserves the right to change or discontinue designs without notice.



LOGAN HIGH PRESSURE TYPE L PACKER TYPE CASING PATCH - 15,000 PSI

O.D. CASING		4-1/2	5-1/2	14				
O.D. PATCH		6-1/4	7-1/8	17-3/8				
PRESSURE RATING (PSI)		15,000	15,000	15,000				
COMPLETE ASSEMBLY	Logan Part No.	515-625-15	515-713	515-1738				
TOP SUB	Logan Part No.	BT1005-15	ZL1007-15	AT1009-15				
TOP SUB SEAL (SMALL)	Logan Part No.	568248-200	568257-200	568280-200				
	No. Req'd	2	2	2				
TOP SUB SEAL (LARGE)	Logan Part No.	568251-200	568257-200	568281-200				
	No. Req'd	1	1	1				
BOWL	Logan Part No.	BT2005-15	ZL2007-15	AT12009-15				
GUIDE	Logan Part No.	BT7005-15	ZL7007-15	AT13009-15				
SHEAR PINS	Logan Part No.	AC14002	AC14002	AC14008				
	No. Req'd	2	2	4				
TYPE L PACKER	Logan Part No.	AT6009	AT6000	AT15009-15-002				
	No. Req'd	4	4	4				
SEAL PROTECTOR RING, LEAD	Logan Part No.	AT15009-15-003				
	No. Req'd	4				
NON-EXTRUSION RING, STEEL	Logan Part No.	AT15009-15-004				
	No. Req'd.	4				
PACKER PROTECTOR	Logan Part No.	ZL3005-001	ZL3007	AT7009-15				
GRAPPLE CONTROL	Logan Part No.	Z6005 **	ZL6007-15	AT10009-15				
GRAPPLE	Logan Part No.	Z5005	ZL5007-15	AT11009-15				

OPTIONAL

EXTENSION SUB (5 feet long)	Logan Part No.	BTE1005-15	BTE1007-15	AT3009-15				
EXTENSION SUB SEAL (SMALL)	Logan Part No.	568248-200	568257-200	568280-200				
	No. Req'd	2	2	2				
EXTENSION SUB SEAL (LARGE)	Logan Part No.	568251-200	568257-200	568281-200				
	No. Req'd	1	1	1				

Logan Oil Tools reserves the right to change or discontinue designs without notice.

** Mill Control Packer instead of Grapple Control

Notes:

- (1) H₂S casing patches available upon request.
- (2) Other sizes of casing patches are available upon request.
- (3) Casing patches can be made from special materials.
Prices and delivery information is available upon request.


When ordering, please specify:

- (1) Complete assembly or part number
- (2) Size and type of connection
- (3) With or without five-foot extensions



STRENGTH DATA FOR 6-1/4" OD CASING PATCH FOR 4-1/2" CASING, ASSEMBLY NO. 515-625-15

15,000 MAXIMUM WORKING PRESSURE, 150K YIELD MATERIAL

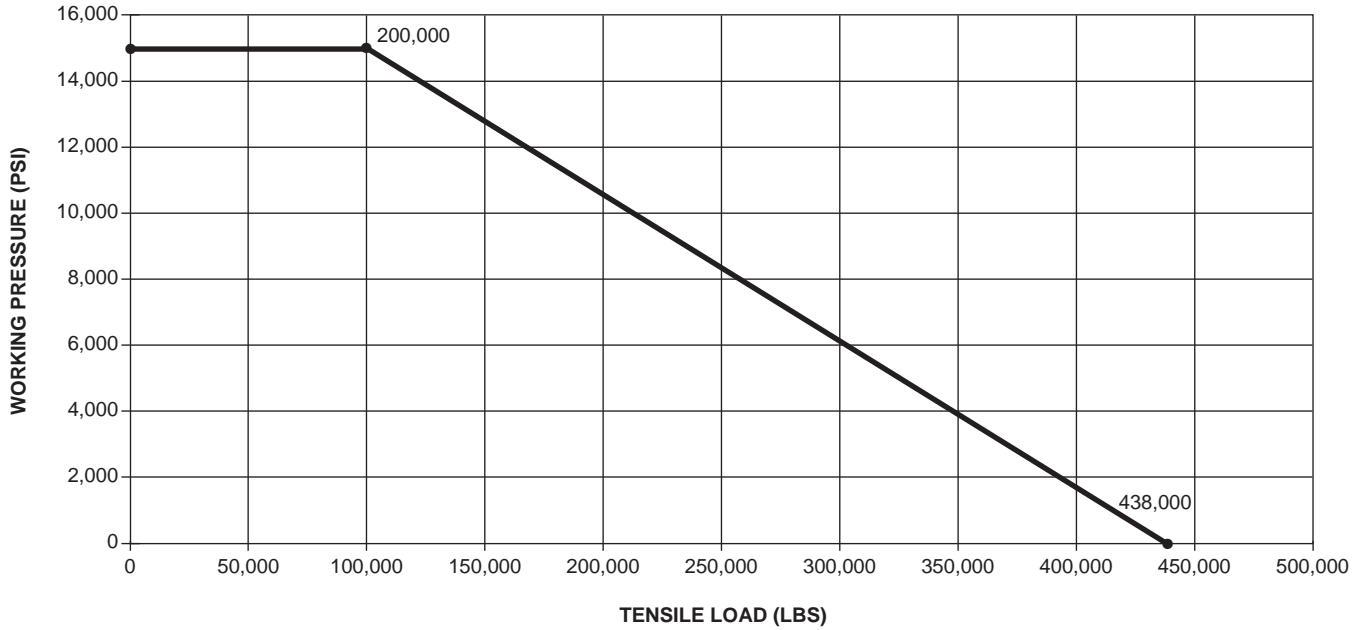

Collapse Pressure:

20,557 psi @ 0 lbs Tensile
10,095 psi @ 1,174,778 lbs Tensile

Tensile Strength @ Yield:


With 0 psi Internal Pressure = 548,205 lbs
With 15K psi Internal Pressure = 309,641 lbs

Torque:

Maximum = 12,035 ft/lbs
Recommended = 7,055 ft/lbs

STRENGTH DATA FOR 7-1/8" OD CASING PATCH FOR 5-1/2" CASING, ASSEMBLY NO. 515-713

15,000 MAXIMUM WORKING PRESSURE, 140K YIELD MATERIAL

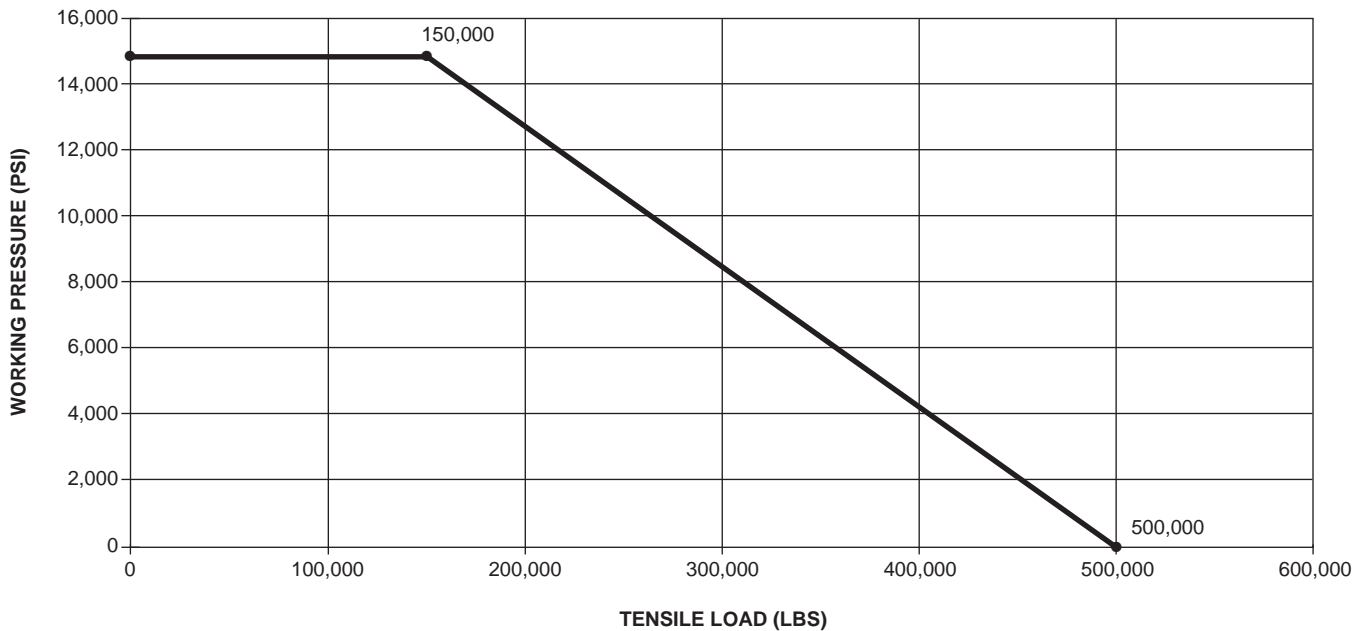

Collapse Pressure:


16,537 psi @ 0 lbs Tensile
11,317 psi @ 632,968 lbs Tensile

Tensile Strength @ Yield:

With 0 psi Internal Pressure = 632,968 lbs
With 15K psi Internal Pressure = 276,593 lbs



STRENGTH DATA FOR 17-3/8" OD CASING PATCH FOR 14" CASING, ASSEMBLY NO. 515-1738
15,000 MAXIMUM WORKING PRESSURE, 125K PSI YIELD MATERIAL

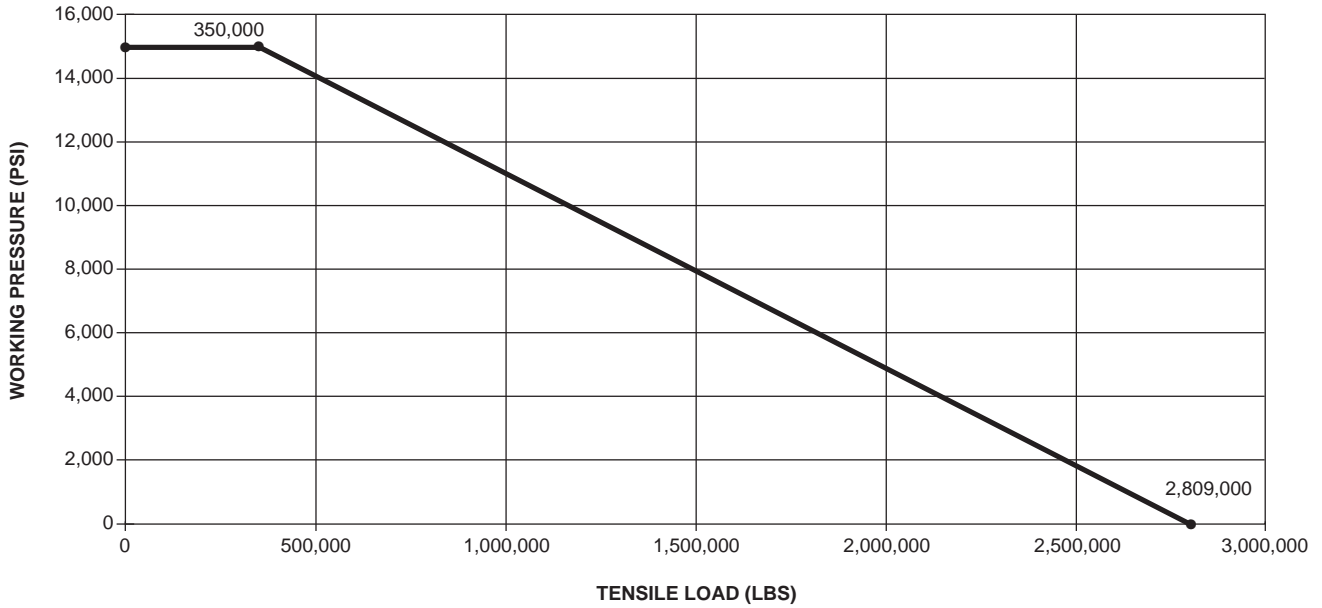

Collapse Pressure:
15,684 psi @ 0 lbs Tensile
11,862 psi @ 2,809,070 lbs Tensile

Tensile Strength @ Yield:
With 0 psi Internal Pressure = 3,511,338 lbs
With 15K psi Internal Pressure = 1,202,267 lbs



CORPORATE HEADQUARTERS

▲ **Logan International, Inc.**
7850 North Sam Houston Parkway West
Suite 100
Houston, Texas 77064
832.386.2500 | Fax 281.227.1766

635 8th Avenue Southwest
Suite 850
Calgary, Canada T2P 3M3
403.930.6810 | Fax 403.930.6811

U.S. SALES OFFICES

▲ **California**
3155 Pegasus Drive
Bakersfield, CA 93308-6800
661.387.1449 | Fax 661.387.1624

▲ **Louisiana**
103 Bluffwood Drive
Broussard, LA 70518-3310
337.839.2331 | Fax 337.839.2334

118 Common Court
Houma, LA 70360-7982
985.868.7333 | Fax 985.868.7007

▲ **North Dakota**
4925 Highway 85 South
Williston, ND 58801
701.572.0565 | Fax 701.572.0644

▲ **Oklahoma**
424 South Eagle Lane
Oklahoma City, OK 73128-4225
405.782.0625 | Fax 405.782.0760

▲ **Pennsylvania**
244 Grey Fox Drive, Suite 1
Montoursville, PA 17754-9572
570.546.1066 | Fax 570.546.0388

▲ **Texas**
1519 South Flournoy
Alice TX, 78332
361.396.0139 | Fax 361.396.0112

11610 Cutten Road
Houston, TX 77066-3008
832.602.2134 | Fax 832.286.4117

11006 Lucerne Street
Houston, Texas 77016-1920
281.219.6613 | Fax 281.219.6638

1305 Energy Drive
Kilgore, TX 75662-5539
903.984.6700 | Fax 903.984.6755

601 McDonald
Odessa, TX 79761-6106
432.580.7414 | Fax 432.580.7656

▲ **Utah**
1369 South 1100 East
Vernal, UT 84078-8600
435.781.2856 | Fax 435.781.2858

INTERNATIONAL STOCKING DISTRIBUTORS

▲ **Canada**
Logan Oil Tools
9755 45th Avenue NW
Edmonton, Alberta T6E 5V8
780.433.9957 | Fax 780.468.1979

▲ **Colombia**
Logan Oil Tools Sucursal Colombia
Calle 113 No. 7-21
Edificio Teleport Business Park
Torre A, Oficina 915
Bogota, Colombia
(57.1).629.1995 | Fax (57.1).612.8357

▲ **Singapore**
Logan Oil Tools Pte Ltd
54 Loyang Way
Singapore 508747
65.65428422 | Fax 65.65420477

▲ **United Arab Emirates**
Logan Oil Tools
Jebel Ali Free Zone (South)
P.O. Box 23724
Dubai, UAE
971.4.813.8000 | Fax 971.4.813.8001

▲ **Woodhouse International**
P.O. Box 23724
Dubai, UAE
971.4.347.2300 | Fax 971.4.347.4642

▲ **United Kingdom**
Logan Oil Tools, U.K. Ltd.
Unit C1 Kintore Business Park
Kintore, Inverurie
Aberdeenshire AB51 0YQ
Scotland
+44.1467.631190